

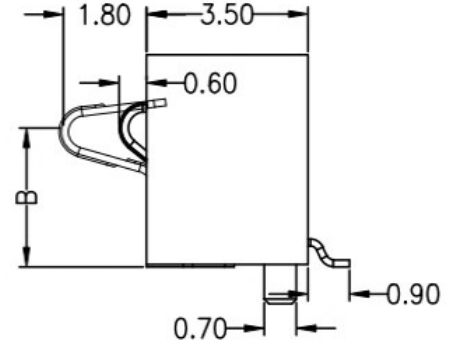
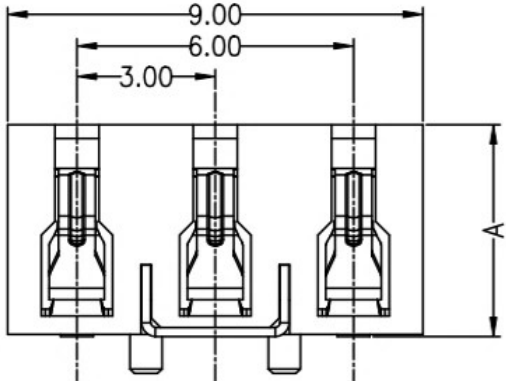


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

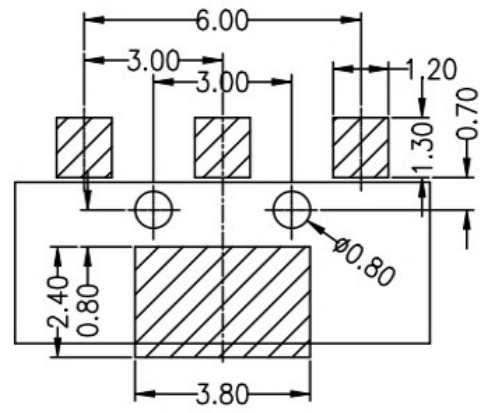

A	B
4.60	3.00
5.00	3.40
5.40	3.80
6.00	4.40
6.80	5.20
7.20	5.60

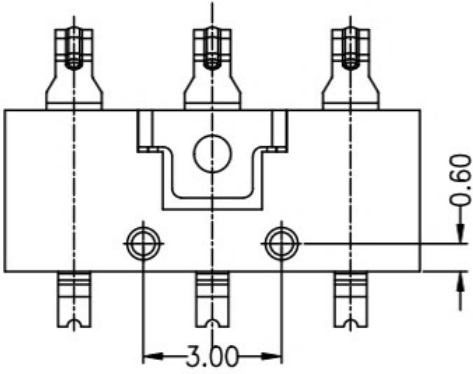

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

性能:
 额定电流: 3.0A
 额定电压: 24V
 耐电压: 500V
 接触电阻: 30mΩ MAX
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP, 耐高温260℃
 接触点(材质): 铜合金, 触点镀金3U'

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK

UNLESS OTHERWISE SPECIFED TOLERANCES					
DECIMALS:		ANGLES:			
DIM	TOL	DIM	TOL		
X.	±0.50	X.	±2°		
X.X	±0.30	X.X	±1°		
X.XX	±0.20	X.XX			
X.XXX	±0.10	X.XXX			

东莞市高迪电子有限公司					
DWG NO.		PART NAME:			
DESIGN:		PART NO.			
CHECK:					
APPROVED					
REV.	UNIT:	SHEET:			
A	mm	1/1			