

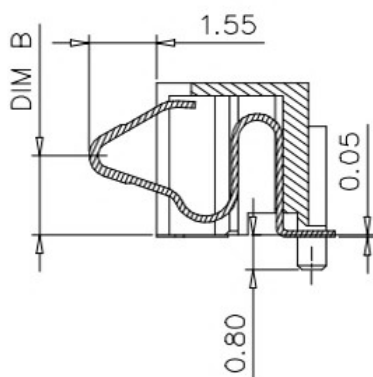
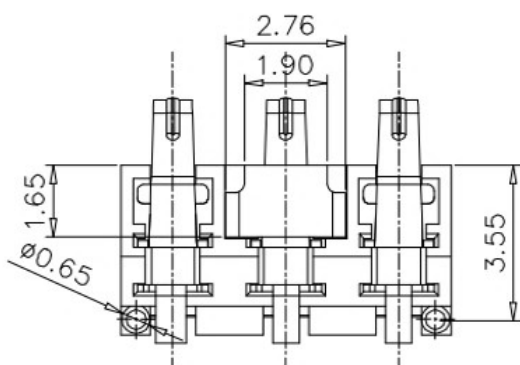


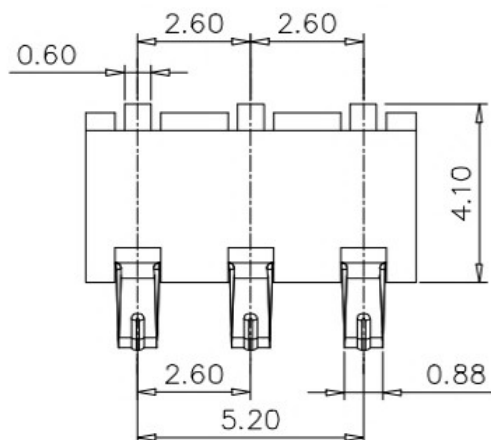


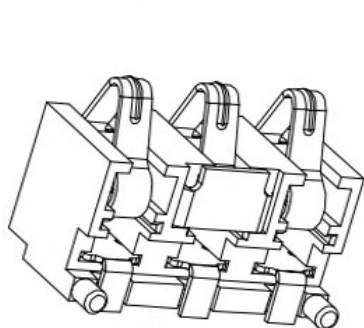

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

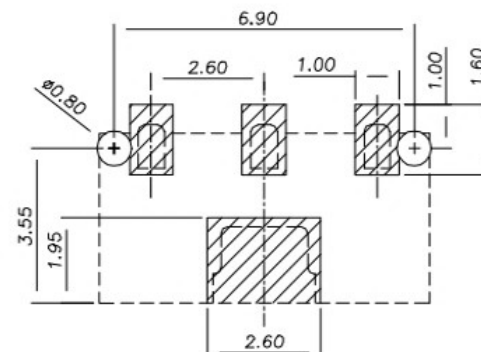

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

A	B
4.00	2.30
3.50	1.90

性能:

额定电流: 3.0A

额定电压: 24V

耐电压: 500V

接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP, 耐高温260℃

接触点(材质): 铜合金, 触点镀金3U'

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:

DIM TOL

X. ±0.50

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

ANGLES:

DIM TOL

X. ±2°

X.X ±1°

X.XX ---

X.XXX ---

DWG NO.

DESIGN:

CHECK:

APPROVED

东莞市高迪电子有限公司

PART NAME:

PART NO.

REV.

A

UNIT:

mm

SHEET:

1/1

1/1

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK