

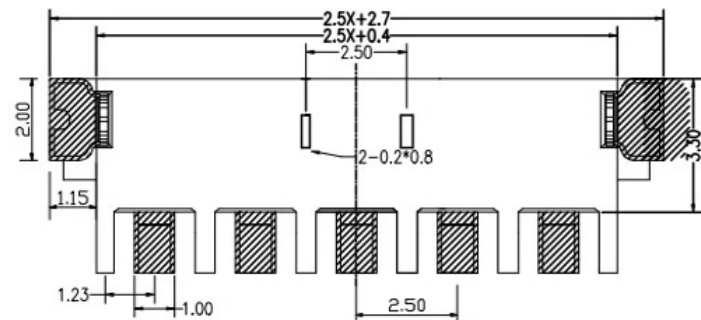
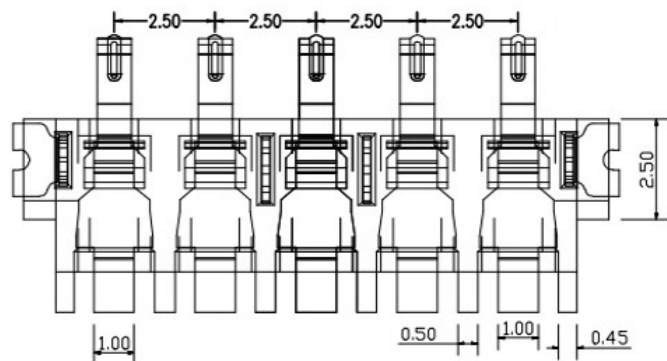
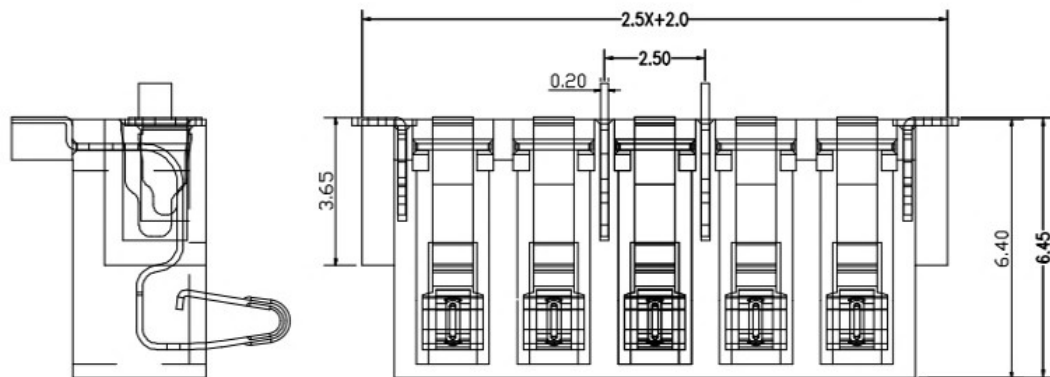



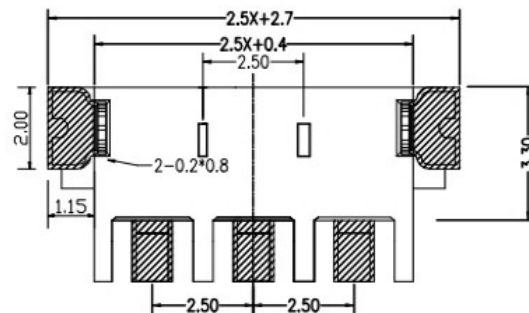


PCB LAYOUT (5pin)

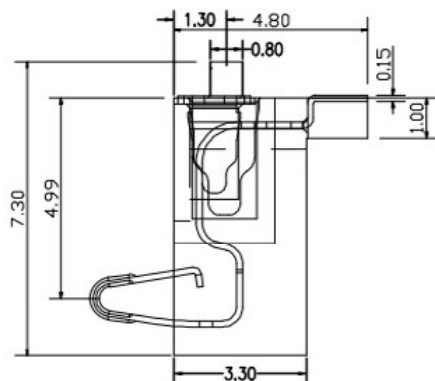

PCB LAYOUT (3pin)

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

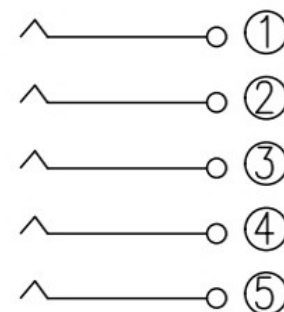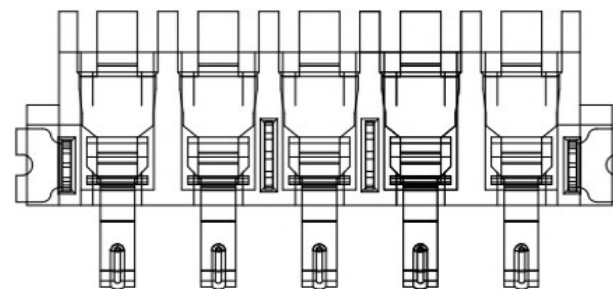

CIRCUIT

性能:

额定电流: 3.0A

额定电压: 24V

耐电压: 500V

接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP, 耐高温260℃

接触点(材质): 铜合金, 触点镀金3U'

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市高迪电子有限公司

DECIMALS:

ANGLES:

DWG NO.

PART NAME:

DESIGN:

PART NO.

CHECK:

APPROVED

REV.

UNIT:

SHEET:



②	HOUSING	1	LCP	BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION

DIM	TOL
X.	±0.50
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10

DIM	TOL
X.	±2°
X.X	±1°
X.XX	±1°
X.XXX	±1°

A	mm	1/1	
---	----	-----	--