


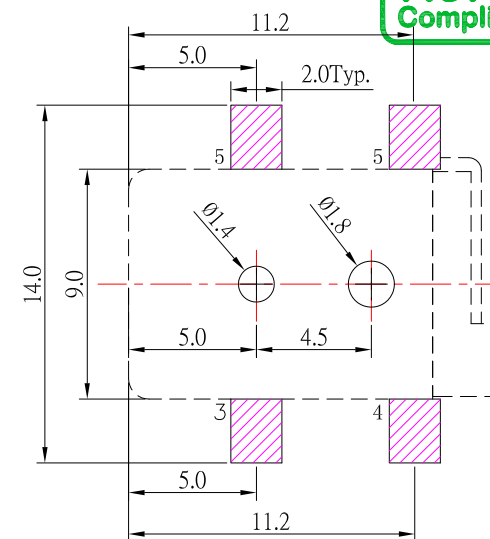
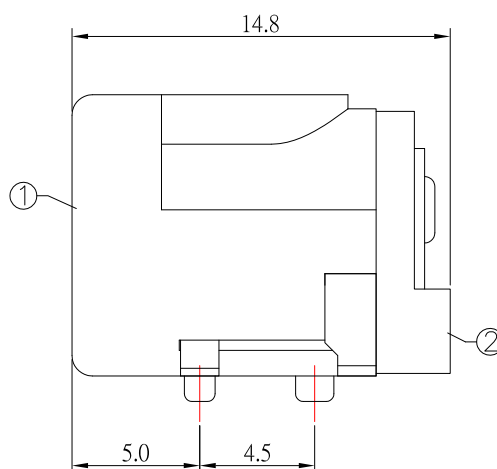
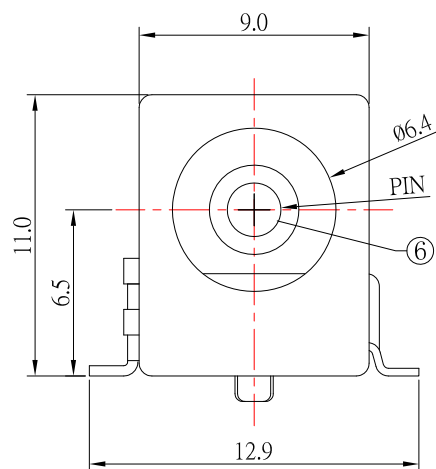


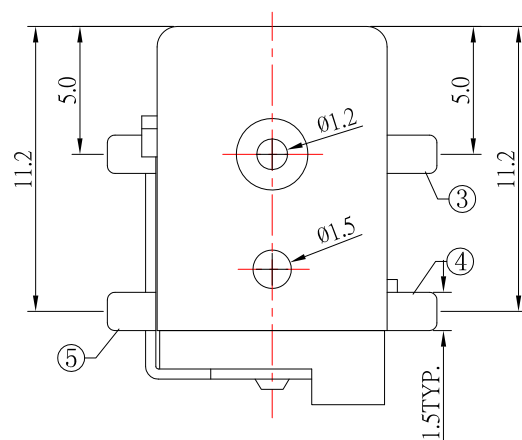

P. C. B LAYOUT
TOP VIEW



MODEL NO.	DC-016B-x
SCHEMATIC	
CENTER PIN	Ø2.0mm
	Ø2.5mm

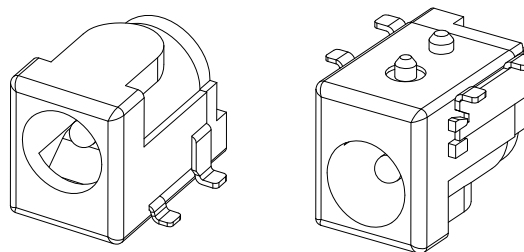

SPECIFICATION

- 1.Rating : DC 30V,2.0A(12V,5.0A) ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

6	PIN	1	BRASS	Ni-Plating
5	FLAT FOOT	1	BRASS	Ag-Plating
4	CURVE PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	BRONZE	Ag-Plating
2	COVER	1	PA9T	
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
01/16/17

CHECKED BY:
Jacky Chen

DATE
01/16/17

APPROVED BY:
Tony Kao

DATE
01/16/17

MAT'L		TITLE	JACK
FINISH		MODLE	DC JACK 小柱
SCALE	1 : 1	DWG NO.	DC-016B-x-S124
SHEET NO.	1 of 1	PART NO.	DC-016B-x-S124

SIZE
A4
VER
R