

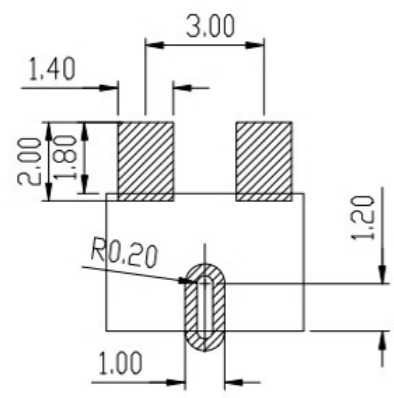

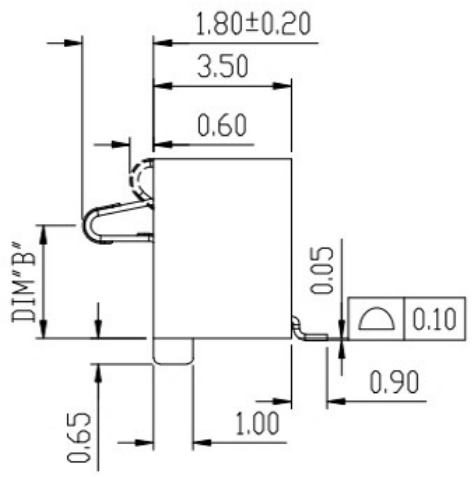


| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
|------|---------|-------------|--------|------------|
| A    |         | INITIAL     | Kai    | 2018.03.29 |



RECOMMENDED PCB LAYOUT  
TOL:(±0.05)



| DIM A | DIM B |
|-------|-------|
| 4.6   | 2.9   |
| 5.0   | 3.3   |
| 6.5   | 4.8   |
| 7.2   | 5.5   |

性能:  
 额定电流: 3.0A  
 额定电压: 24V  
 耐电压: 500V  
 接触电阻: 30mΩ MAX  
 绝缘电阻: 500MΩ  
 工作温度: -40℃~+85℃  
 塑件(材质): LCP, 耐高温260℃  
 接触点(材质): 铜合金, 触点镀金3U'

| ②    | HOUSING   | 1    | LCP                   |             | BLACK  |
|------|-----------|------|-----------------------|-------------|--------|
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |
| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |

UNLESS OTHERWISE SPECIFIED TOLERANCES

| DECIMALS: |       | ANGLES: |      |
|-----------|-------|---------|------|
| DIM       | TOL   | DIM     | TOL  |
| X.        | ±0.50 | X.      | ±2°  |
| X.X       | ±0.30 | X.X     | ±1°  |
| X.XX      | ±0.20 | X.XX    | ---- |
| X.XXX     | ±0.10 | X.XXX   | ---- |

东莞市高迪电子有限公司

|          |  |            |
|----------|--|------------|
| DWG NO.  |  | PART NAME: |
| DESIGN:  |  | PART NO.   |
| CHECK:   |  |            |
| APPROVED |  |            |

|      |       |        |  |
|------|-------|--------|--|
| REV. | UNIT: | SHEET: |  |
| A    | mm    | 1/1    |  |