


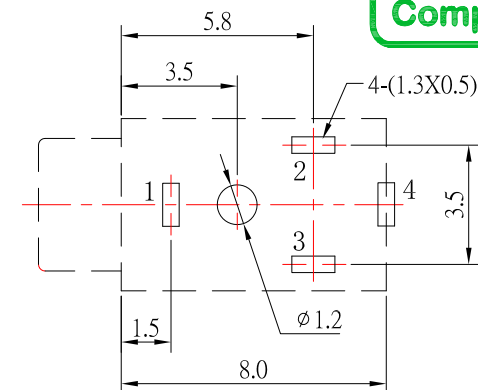
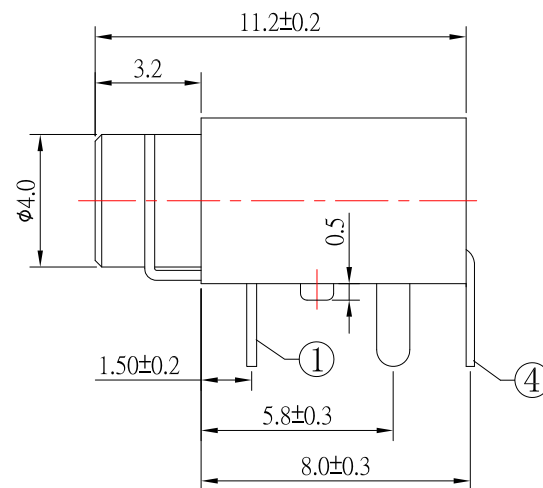
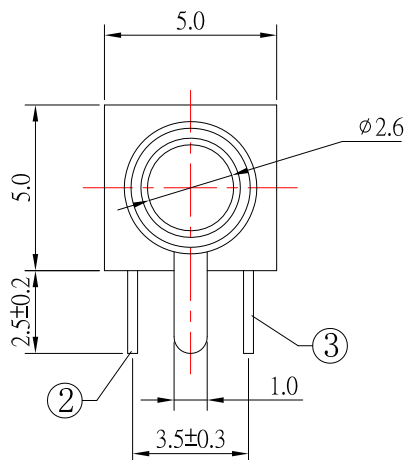


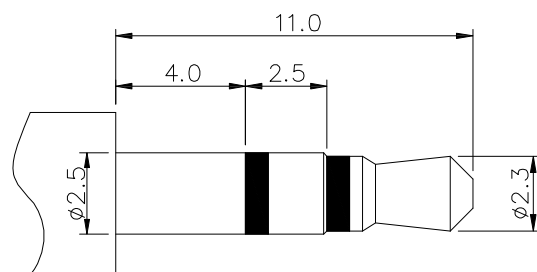

P. C. B LAYOUT  
TOP VIEW



ø2.50mm 3 POLE PLUG

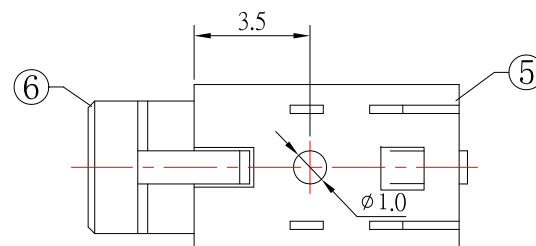

### SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance :  $\leq 30m\Omega$
3. Insulation resistance :  $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

|     |                 |     |                 |            |
|-----|-----------------|-----|-----------------|------------|
| ⑥   | AXIS SUPPORT    | 1   | BRASS           | Ni-Plating |
| ⑤   | HOUSING         | 1   | PBT             |            |
| ④   | 4# CONTACT FOOT | 1   | PHOSPHOR BRONZE | Sn-Plating |
| ③   | 3# CONTACT FOOT | 1   | PHOSPHOR BRONZE | Sn-Plating |
| ②   | 2# CONTACT FOOT | 1   | PHOSPHOR BRONZE | Sn-Plating |
| ①   | 1# CONTACT FOOT | 1   | PHOSPHOR BRONZE | Sn-Plating |
| NO. | DESCRIPTION     | QTY | MATERIAL        | PLATING    |



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

|              |          |           |          |             |
|--------------|----------|-----------|----------|-------------|
| DRAWN BY:    | DATE     | MATL      | TITLE    | JACK        |
| Jack Lu      | 07/18/19 |           |          |             |
| CHECKED BY:  | DATE     | FINISH    | MODLE    | PHONE JACK  |
| Jacky Chen   | 07/18/19 |           |          |             |
| APPROVED BY: | DATE     | SCALE     | DWG NO.  | PJ-255-S124 |
| Tony Kao     | 07/18/19 | 1 : 1     | PART NO. | PJ-255-S124 |
|              |          | SHEET NO. | 1 of 1   |             |
|              |          |           |          | SIZE<br>A4  |
|              |          |           |          | VER<br>R1   |