
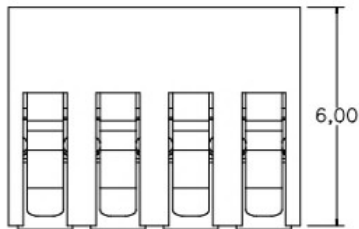
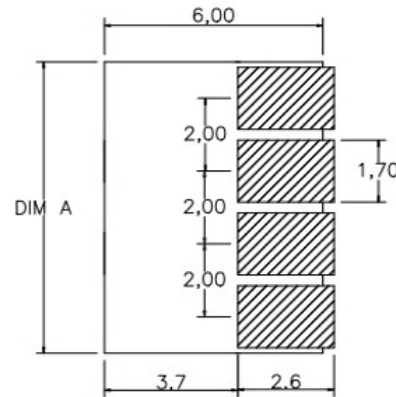

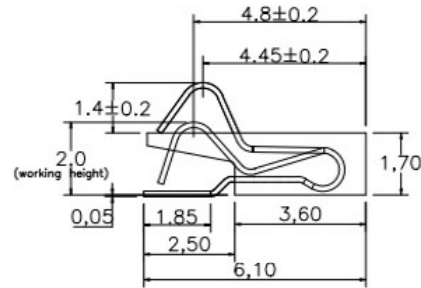
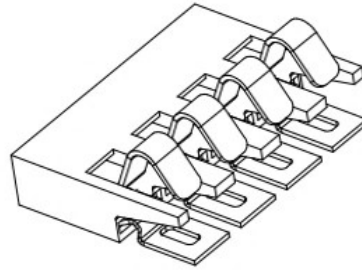


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

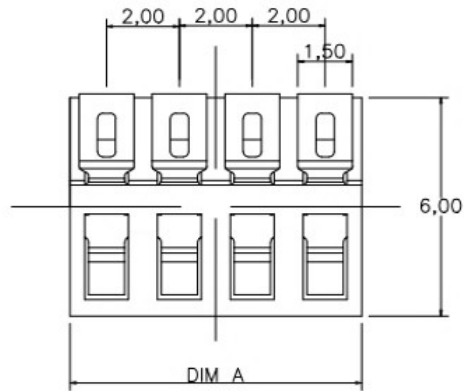

RECOMMENDED PCB LAYOUT
TOP VIEW(.XX±0.05)

Pin (N)	DIM A
2Pin	4.0
3Pin	6.0
4Pin	8.0
5Pin	10.0
6Pin	12.0
7Pin	14.0
8Pin	16.0

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:

ANGLES:

DIM	TOL
X.	±0.50
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10

DIM	TOL
X.	±2°
X.X	±1°
X.XX	±1°
X.XXX	±1°

DWG NO.

DESIGN:

CHECK:

APPROVED

东莞市高迪电子有限公司

PART NAME:

PART NO.

REV. A

UNIT: mm

SHEET: 1/1



ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	