
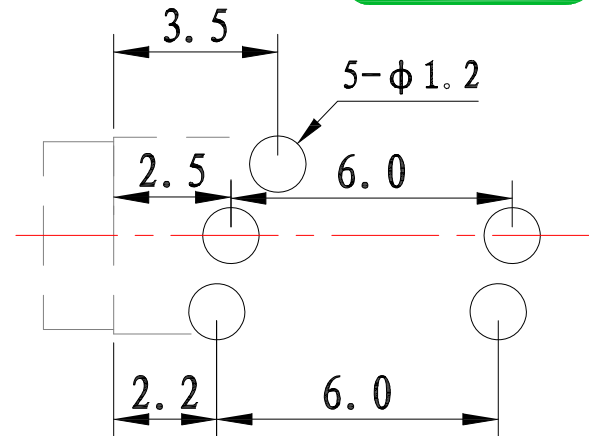
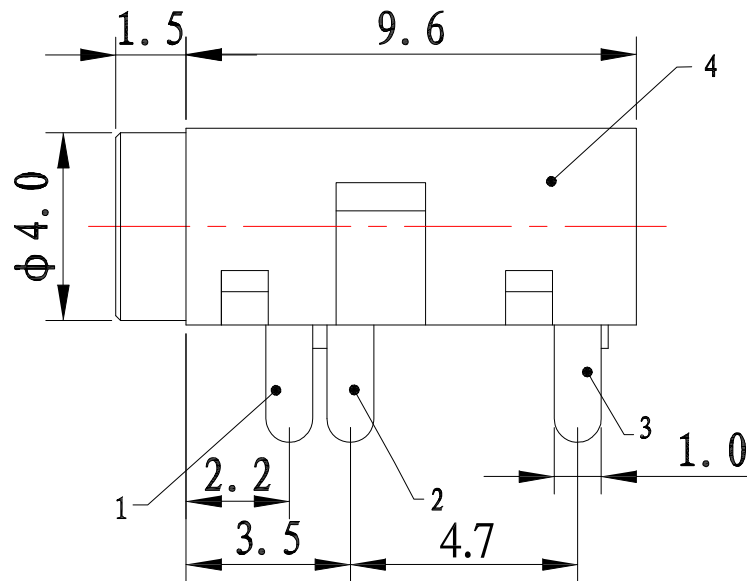


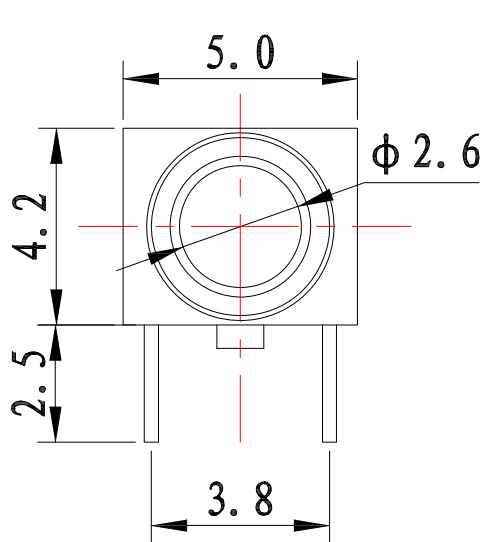

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles °

MODEL NO.	PJ-D2016-S187
SCHEMATIC	

4	HOUSING	1	PA66(Black)	
3	CONTACT FOOT	1	Phosphor Bronze	Ag-Plating
2	CONTACT FOOT	1	Phosphor Bronze	Ag-Plating
1	CONTACT FOOT	1	Phosphor Bronze	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	03/15/13			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	03/15/13			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D2016-S187
Tony Kao	03/15/13	1 : 1		
		SHEET NO.	PART NO.	PJ-D2016-S187

1	更新尺寸	Jack	031513
ITEM NO.	DESCRIPTION	DRAWN	DATE