

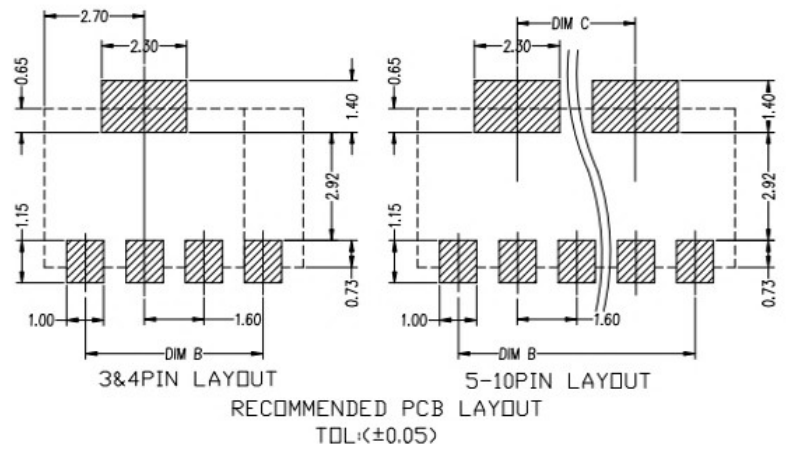






REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29



Pin(N)	DIMA	DIMB	DIMC
3Pin	4.80	3.20	0
4Pin	6.40	4.80	0
5Pin	8.00	6.40	3.20
6Pin	9.60	8.00	4.80
7Pin	11.20	9.60	6.40
8Pin	12.80	11.20	8.00
9Pin	14.40	12.80	9.60
10Pin	16.00	14.40	11.20

性能:
额定电流: 3.0A
额定电压: 24V
耐电压: 500V
接触电阻: 30mΩ MAX
绝缘电阻: 500MΩ
工作温度: -40℃~+85℃
塑件(材质): LCP, 耐高温260℃
接触点(材质): 铜合金, 触点镀金3U'

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市高迪电子有限公司

DECIMALS:	ANGLES:	DWG NO.	PART NAME:
DIM	TOL	DESIGN:	PART NO.
X.	±0.50	CHECK:	
X.X	±0.30	APPROVED	
X.XX	±0.20		
X.XXX	±0.10		

REV.	UNIT:	SHEET:	
A	mm	1/1	