
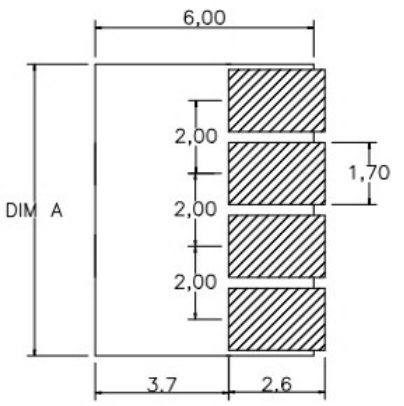

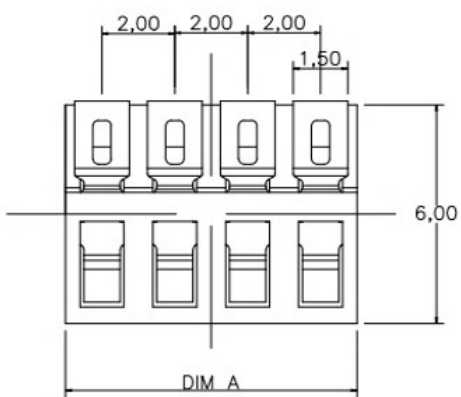
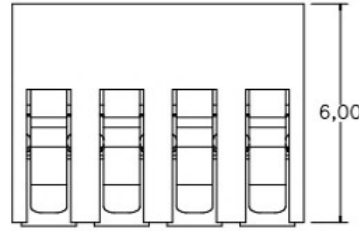
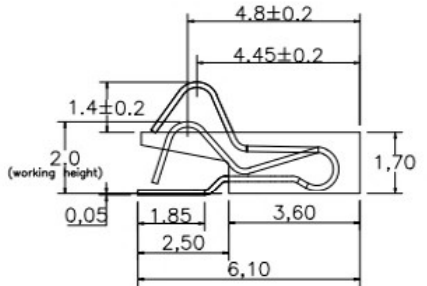


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Koi	2018.03.29

Pin (N)	DIM A
2Pin	4.0
3Pin	6.0
4Pin	8.0
5Pin	10.0
6Pin	12.0
7Pin	14.0
8Pin	16.0

性能：
 额定电流：3.0A
 额定电压：24V
 耐电压：500V
 接触电阻：30mΩ MAX
 绝缘电阻：500MΩ
 工作温度：-40℃~+85℃
 塑件（材质）：LCP，耐高温260℃
 接触点（材质）：铜合金，触点镀金3U'

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市高迪电子有限公司			
DECIMALS:		ANGLES:		DWG NO.	PART NAME:		
DIM	TOL	DIM	TOL	DESIGN:	PART NO.		
X.	±0.50	X.	±2°	CHECK:	REV. UNIT: SHEET: 		
X.X	±0.30	X.X	±1°	APPROVED			
X.XX	±0.20	X.XX	----				
X.XXX	±0.10	X.XXX	----		A	mm	1/1

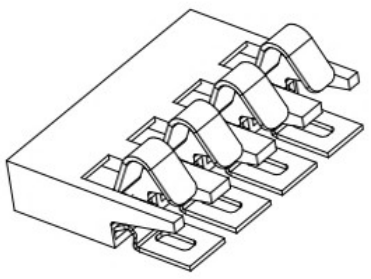

RECOMMENDED PCB LAYOUT
 TOP VIEW(.XX±0.05)

ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	