
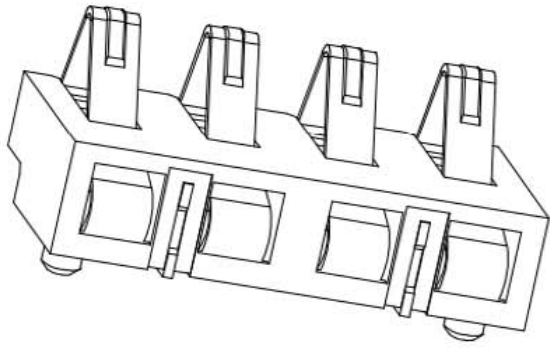
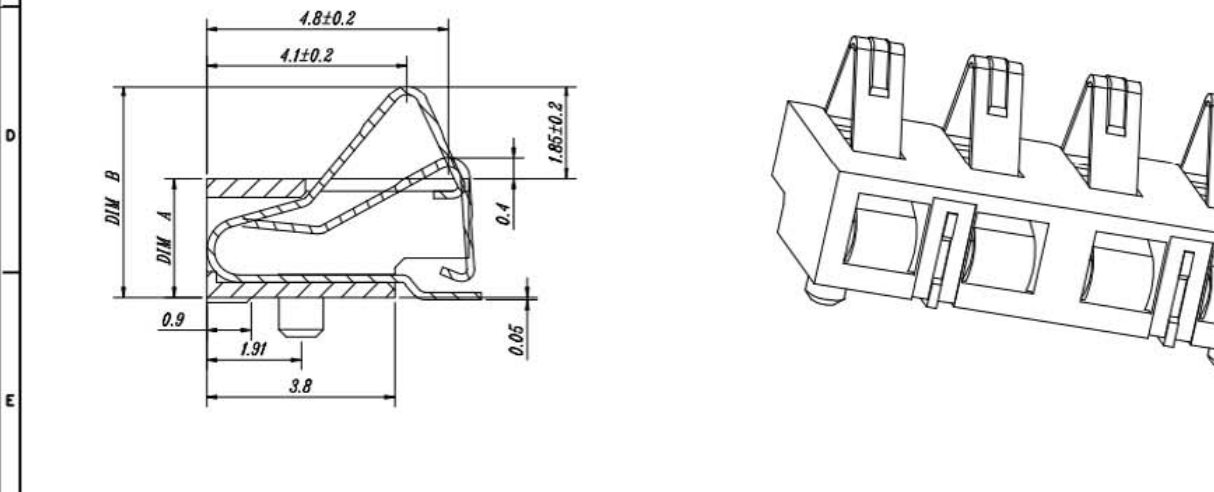
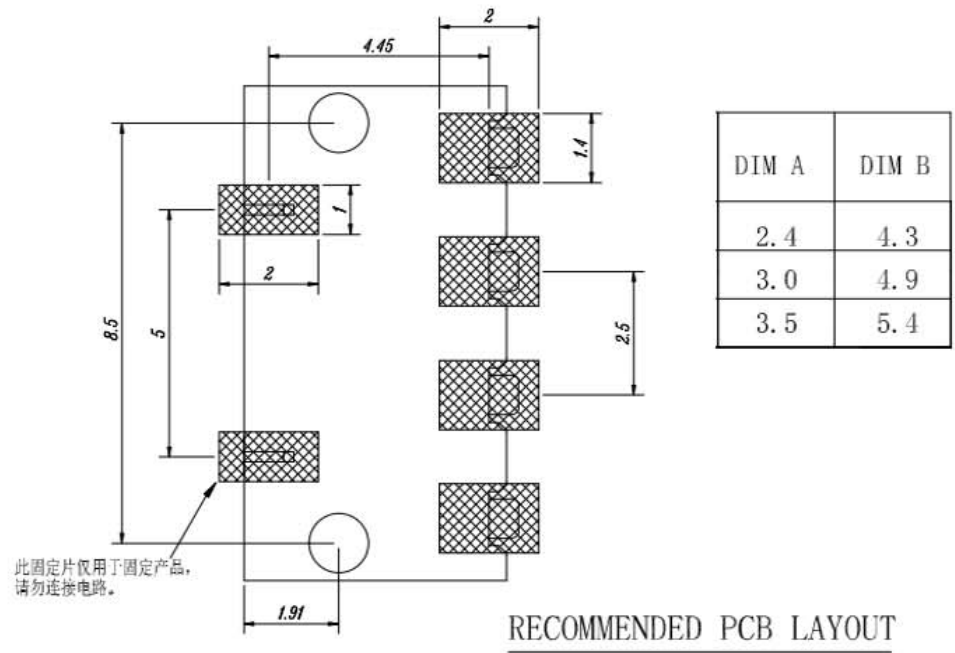


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

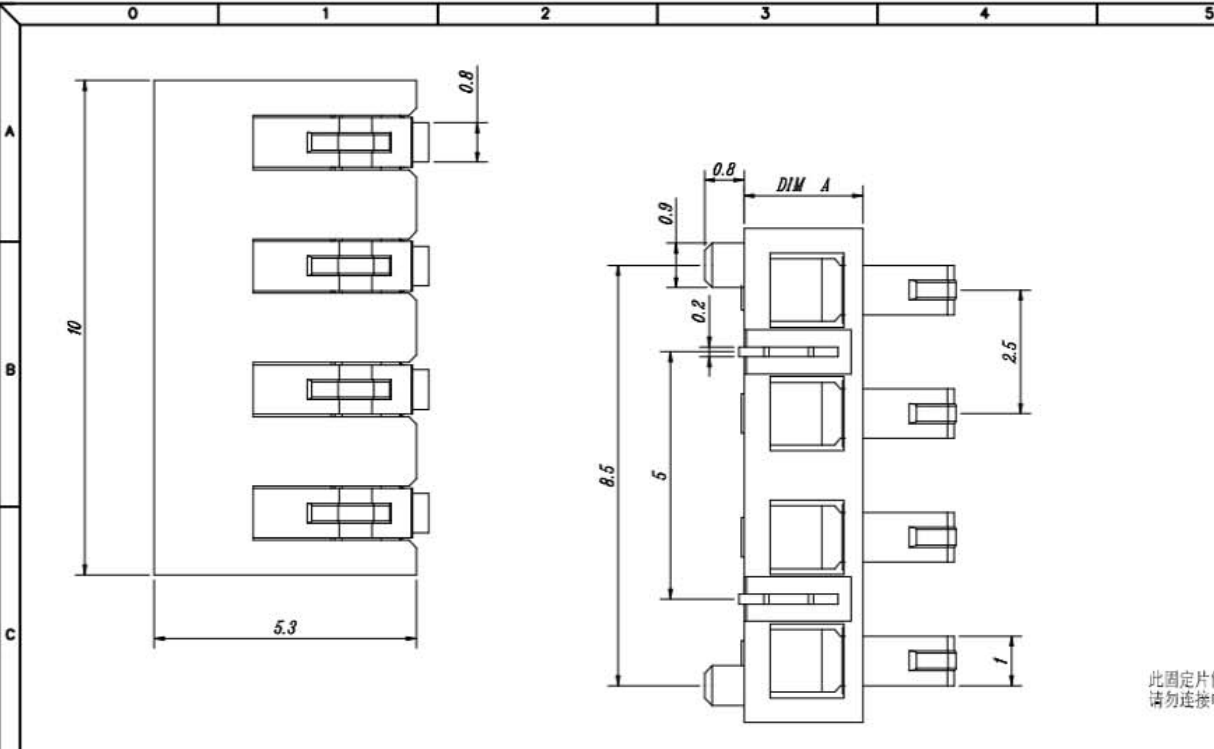

性能:

额定电流: 3.0A

额定电压: 24V

耐电压: 500V

接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP, 耐高温260℃

接触点(材质): 铜合金, 触点镀金3U'

						UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市高迪电子有限公司			
						DECIMALS:		ANGLES:		DWG NO.		PART NAME:	
						DESIGN:				PART NO.			
						CHECK:				REV.		UNIT:	
						APPROVED				SHEET:			
						A		mm		1/1			
						X.		±0.50		X.		±2°	
						X.X		±0.30		X.X		±1°	
						X.XX		±0.20		X.XX		---	
						X.XXX		±0.10		X.XXX		---	
						</							