
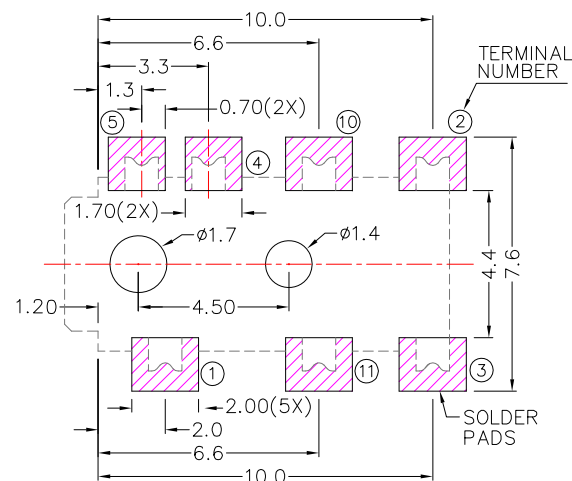
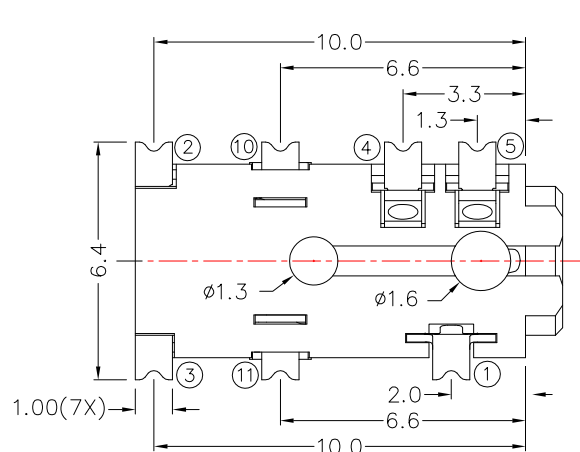


Ø2.5 MATE PLUG



RECOMMENDED
SOLDER PAD LAYOUT

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

* MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 5 : PHOSPHOR BRONZE
TERMINAL 10 : PHOSPHOR BRONZE
TERMINAL 11 : PHOSPHOR BRONZE
HOUSING : PA6T

MODEL NO.	PJ-2937D	PJ-2936AD	PJ-2936BD	PJ-2936D	PJ-2935D
SCHEMATIC					



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/04/15			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	11/04/15			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-293xD
Tony Kao	11/04/15	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-293xD
				SIZE A4
				VER R1