

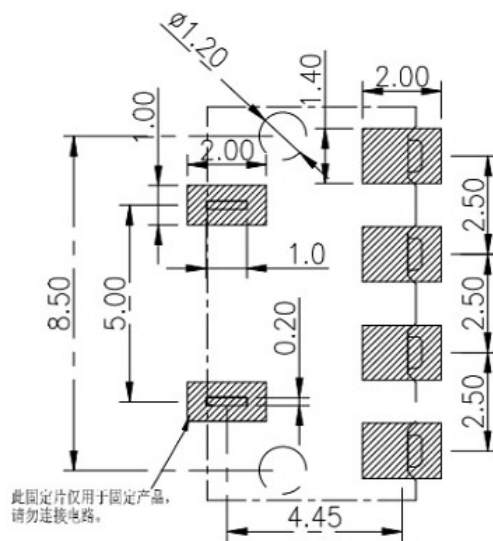
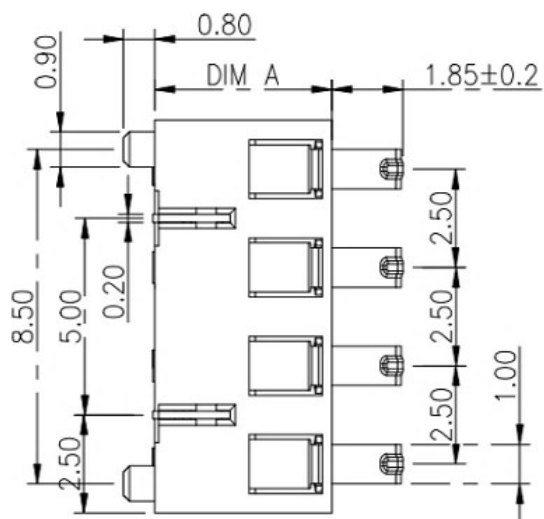


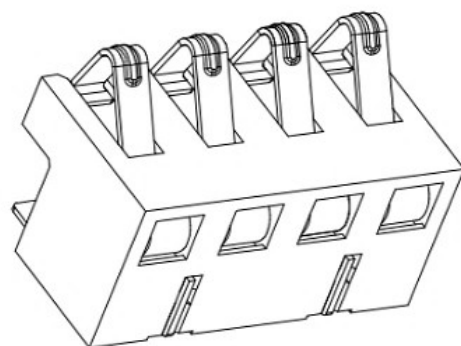


RECOMMENDED PCB LAYOUT

TOP VIEW (. XX±0.05)

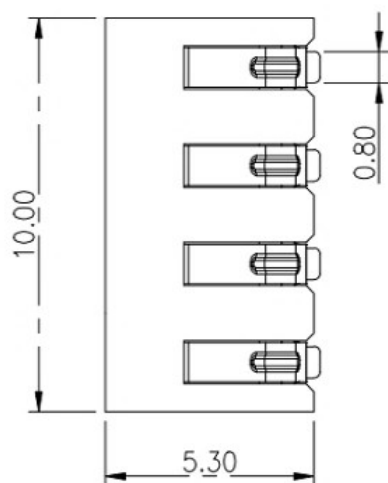

| DIM A | DIM B    |
|-------|----------|
| 4.0   | 5.90±0.2 |
| 4.5   | 6.40±0.2 |
| 5.5   | 7.40±0.2 |

| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
|------|---------|-------------|--------|------------|
| A    |         | INITIAL     | Kai    | 2018.03.29 |

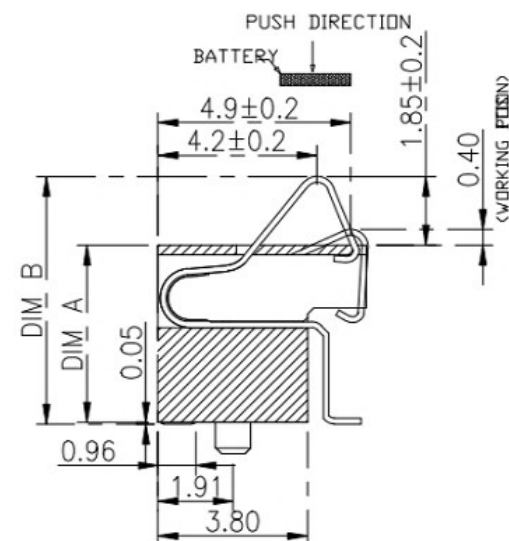

性能:

额定电流: 3.0A

额定电压: 24V

耐电压: 500V

接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件 (材质): LCP, 耐高温260℃

接触点 (材质): 铜合金, 触点镀金3U'

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市高迪电子有限公司

| DECIMALS: |       | ANGLES: |     |
|-----------|-------|---------|-----|
| DIM       | TOL   | DIM     | TOL |
| X.        | ±0.50 | X.      | ±2° |
| X.X       | ±0.30 | X.X     | ±1° |
| X.XX      | ±0.20 | X.XX    |     |
| X.XXX     | ±0.10 | X.XXX   |     |

| DWG NO.    | PART NAME: |
|------------|------------|
| DESIGN:    | PART NO.   |
| CHECK:     |            |
| APPROVED   |            |
| REV. A     | UNIT: mm   |
| SHEET: 1/1 |            |

| ②    | HOUSING   | 1    | LCP                   |             | BLACK  |
|------|-----------|------|-----------------------|-------------|--------|
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |
| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |