
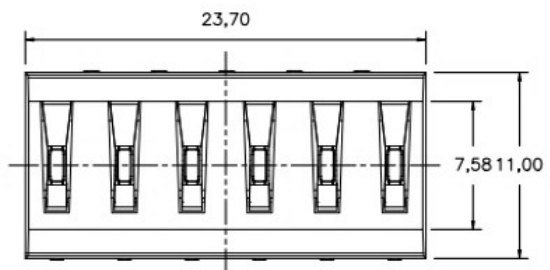
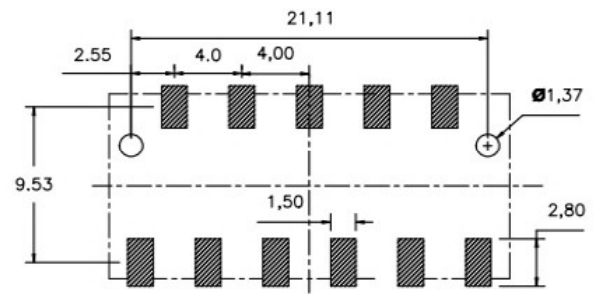
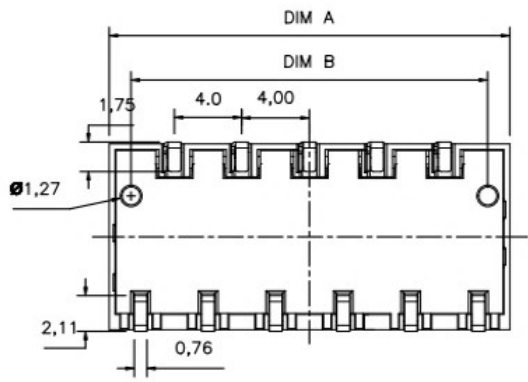


|      |         |             |        |            |
|------|---------|-------------|--------|------------|
| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
| A    |         | INITIAL     | Kai    | 2018.03.29 |

| Pin | DIM A | DIM B |
|-----|-------|-------|
| 2P  | 7.7   | 5.11  |
| 3P  | 11.7  | 9.11  |
| 4P  | 15.7  | 13.11 |
| 5P  | 19.7  | 17.11 |
| 6P  | 23.7  | 21.11 |



性能:  
 额定电流: 3.0A  
 额定电压: 24V  
 耐电压: 500V  
 接触电阻: 30mΩ MAX  
 绝缘电阻: 500MΩ  
 工作温度: -40℃~+85℃  
 塑件(材质): LCP, 耐高温260℃  
 接触点(材质): 铜合金, 触点镀金3U'

|                                       |       |         |     |             |  |            |       |
|---------------------------------------|-------|---------|-----|-------------|--|------------|-------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES |       |         |     | 东莞市高迪电子有限公司 |  |            |       |
| DECIMALS:                             |       | ANGLES: |     | DWG NO.     |  | PART NAME: |       |
| DIM                                   | TOL   | DIM     | TOL | DESIGN:     |  | PART NO.   |       |
| X.                                    | ±0.50 | X.      | ±2° | CHECK:      |  | REV.       | UNIT: |
| X.X                                   | ±0.30 | X.X     | ±1° | APPROVED    |  | A          | mm    |
| X.XX                                  | ±0.20 | X.XX    | --- |             |  | SHEET:     |       |
| X.XXX                                 | ±0.10 | X.XXX   | --- |             |  | 1/1        |       |

|      |           |      |                       |             |        |
|------|-----------|------|-----------------------|-------------|--------|
| ②    | HOUSING   | 1    | LCP                   |             | BLACK  |
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |
| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |