

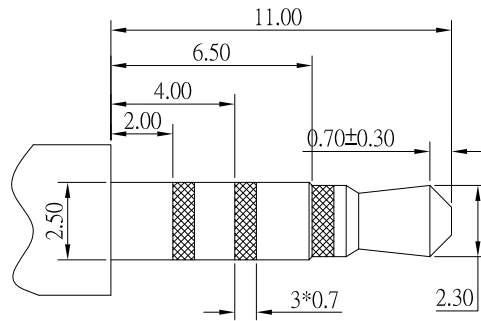
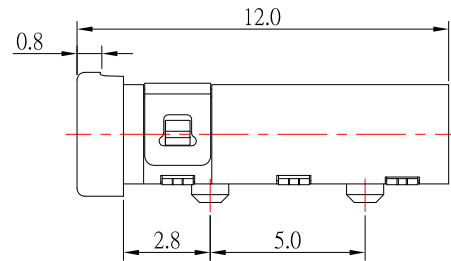

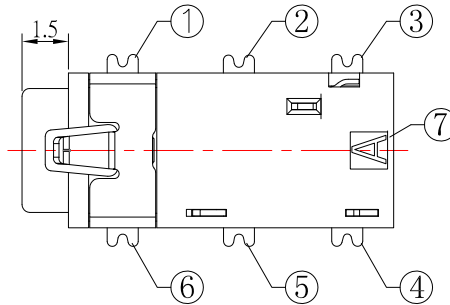



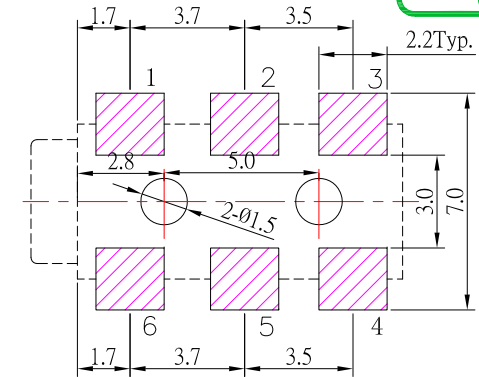

Ø2.50mm 4 POLE PLUG

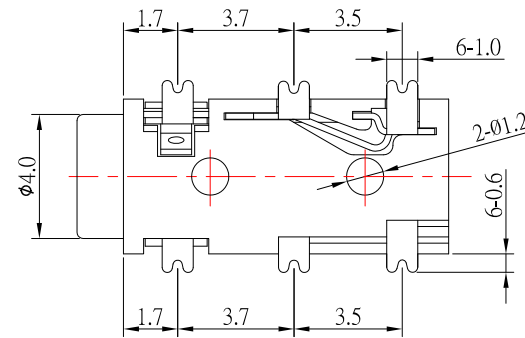

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

MODEL NO.	PJ-2866D-H3	PJ-2864D-H3
SCHEMATIC		

SPECIFICATION

- Rating: DC 30V, 1.0A
- Contact resistance: $\leq 50m\Omega$
- Insulation resistance: $\geq 100M\Omega$
- Withstand voltage: 500VAC
- Insertion and extraction force: 3-20N
- life test: 5,000 cycles

⑦	HOUSING	1	PA9T	
⑥	CONTACT FOOT #6	1	Phosphor Bronze	Au-Plated
⑤	CONTACT FOOT #5	1	Phosphor Bronze	Au-Plated
④	CONTACT FOOT #4	1	Phosphor Bronze	Au-Plated
③	CONTACT FOOT #3	1	Phosphor Bronze	Au-Plated
②	CONTACT FOOT #2	1	Phosphor Bronze	Au-Plated
①	CONTACT FOOT #1	1	Phosphor Bronze	Au-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/13/17			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	01/13/17			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-286xD-H3-S124
Tony Kao	01/13/17	1 : 1		
		SHEET NO.	PART NO.	PJ-286xD-H3-S124
				SIZE A4
				VER R