
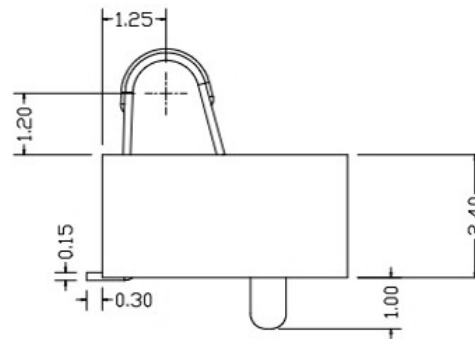
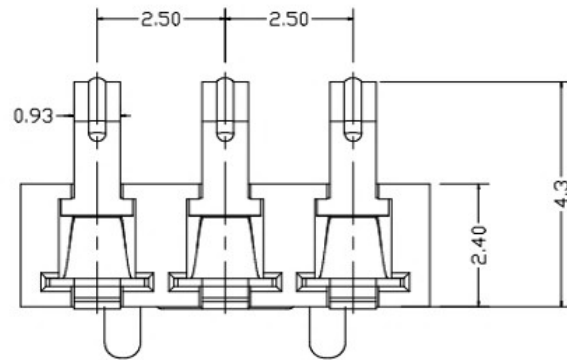
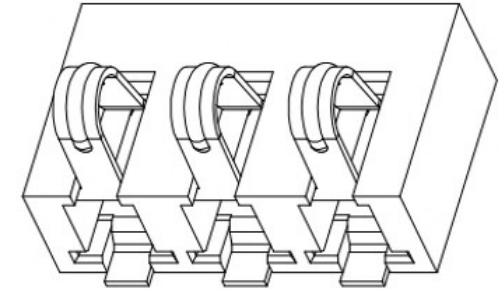
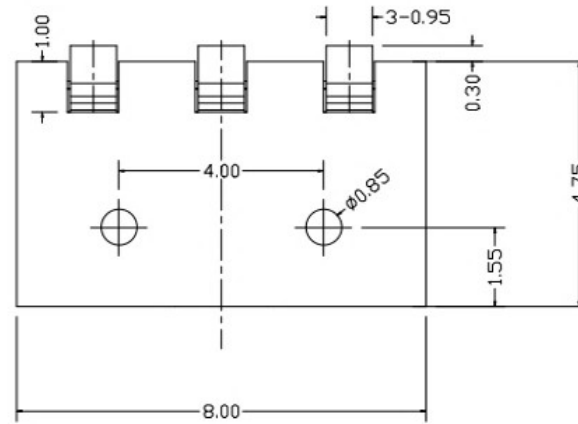


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

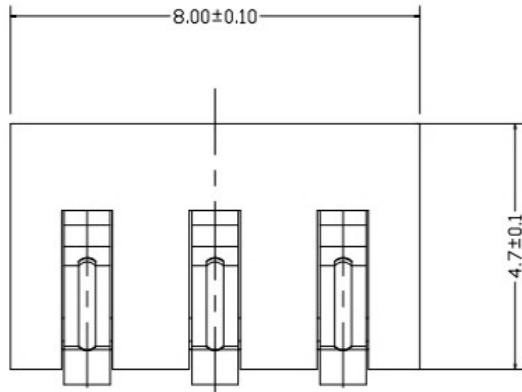

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

塑件（材质）：LCP

接触点（材质）：磷铜，镀金

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市高迪电子有限公司					
DECIMALS:		ANGLES:		DWG NO.		PART NAME:			
				DESIGN:		PART NO.			
DIM	TOL	DIM	TOL	CHECK:					
X.	±0.50	X.	±2°	APPROVED		REV.	UNIT:	SHEET:	
X.X	±0.30	X.X	±1°			A	mm	1/1	
X.XX	±0.20	X.XX	---						
X.XXX	±0.10	X.XXX	---						

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK