


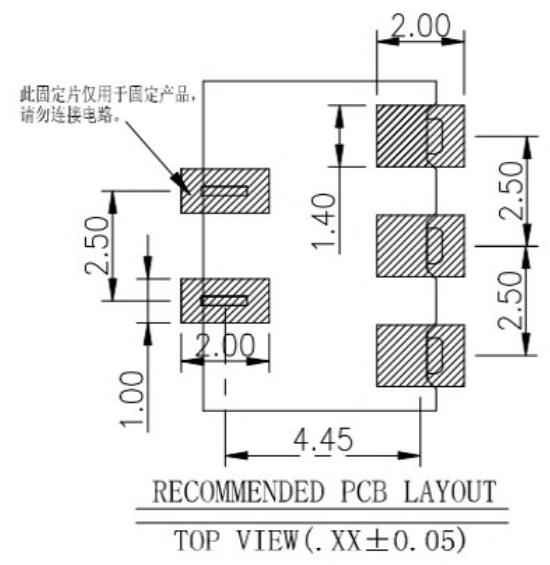
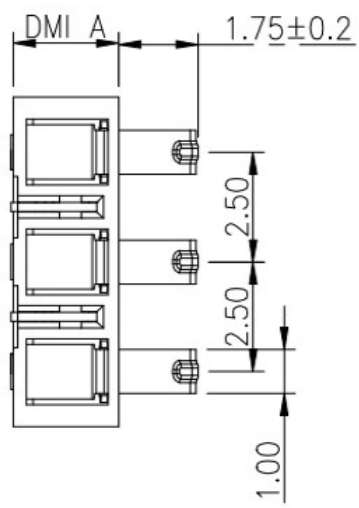


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

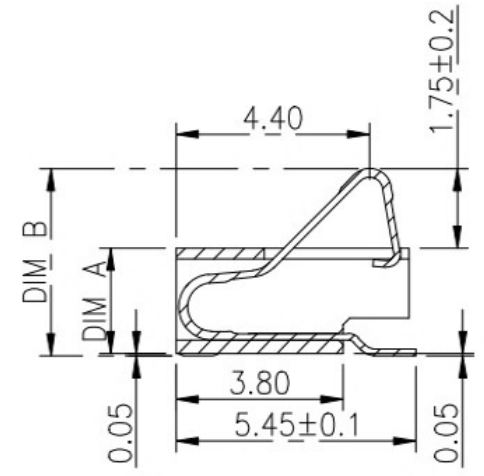

DIM A	DIM B
2.4	4.2
3.0	4.8
3.5	5.3

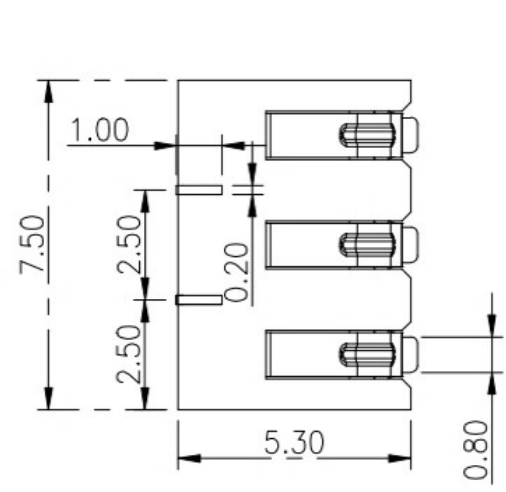

性能:
 额定电流: 3.0A
 额定电压: 24V
 耐电压: 500V
 接触电阻: 30mΩ MAX
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP, 耐高温260℃
 接触点(材质): 铜合金, 触点镀金3U'

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES
 DECIMALS: DIM TOL X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.10
 ANGLES: DIM TOL X. ±2° X.X ±1° X.XX ±1° X.XXX ±1°

东莞市高迪电子有限公司
 DWG NO.
 DESIGN:
 CHECK:
 APPROVED:

PART NAME:
 PART NO.
 REV. A UNIT: mm SHEET: 1/1