
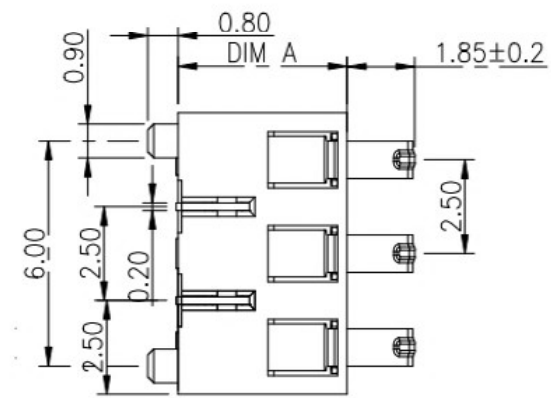
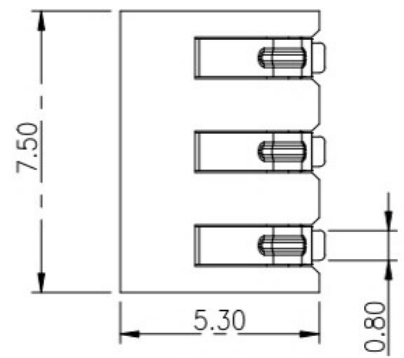
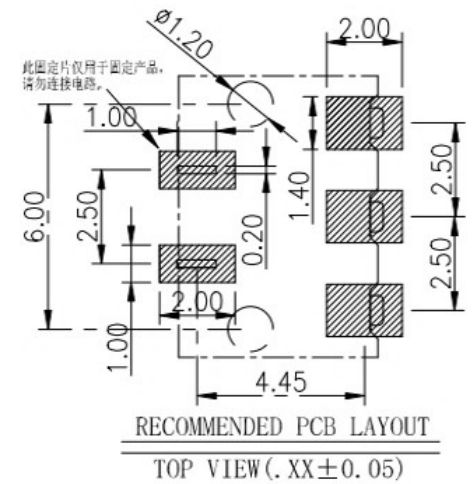
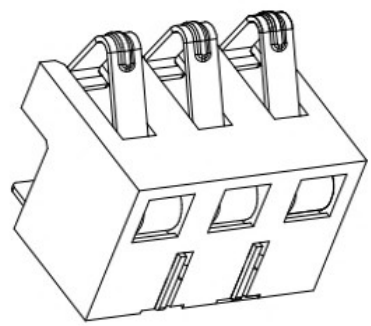


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

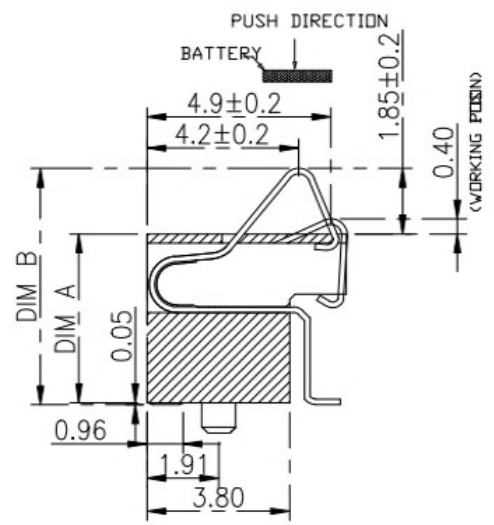

性能:
 额定电流: 3. 0A
 额定电压: 24V
 耐电压: 500V
 接触电阻: 30m Ω MAX
 绝缘电阻: 500M Ω
 工作温度: -40℃~+85℃
 塑件 (材质): LCP, 耐高温260℃
 接触点 (材质): 铜合金, 触点镀金3U'

DIM A	DIM B
4. 0	5. 90±0. 2
4. 5	6. 40±0. 2
5. 5	7. 40±0. 2

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	----
X.XXX	±0.10	X.XXX	----

东莞市高迪电子有限公司

DWG NO.		PART NAME:	
DESIGN:		PART NO.	
CHECK:			
APPROVED		REV. A	UNIT: mm
		SHEET: 1/1	

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK