

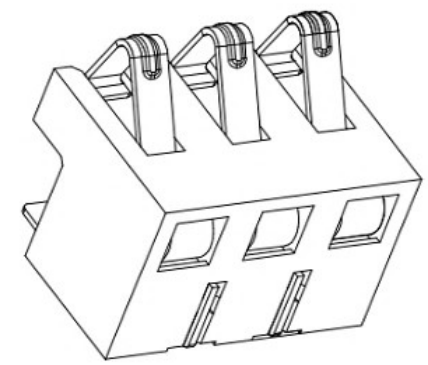
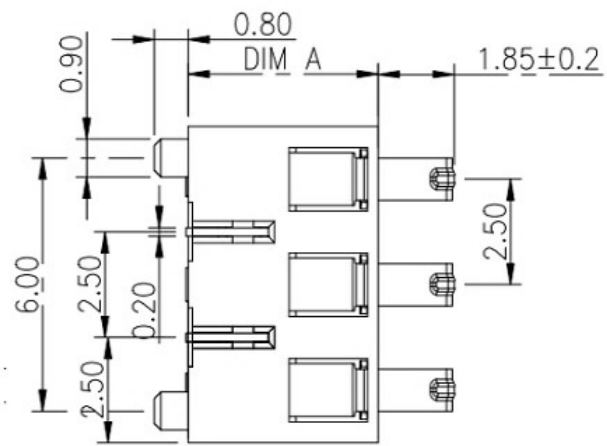
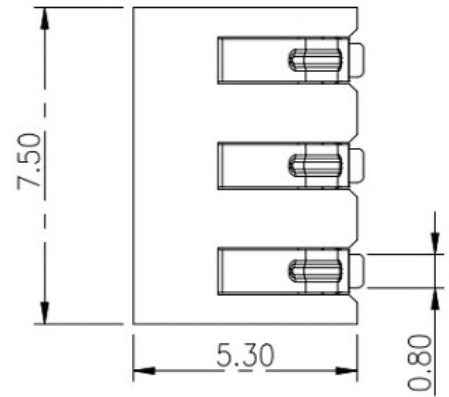


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

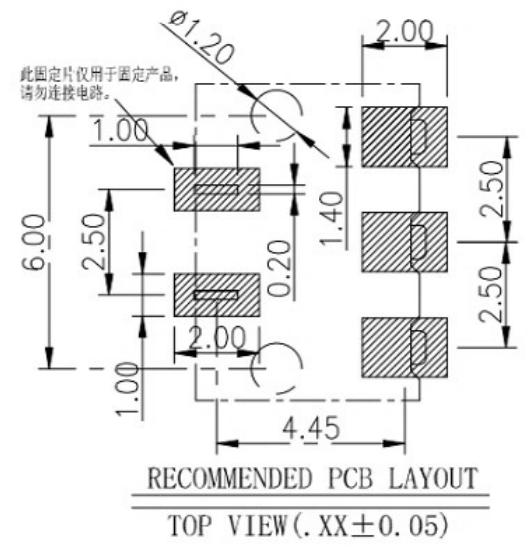

DIM A	DIM B
4.0	5.90±0.2
4.5	6.40±0.2
5.5	7.40±0.2

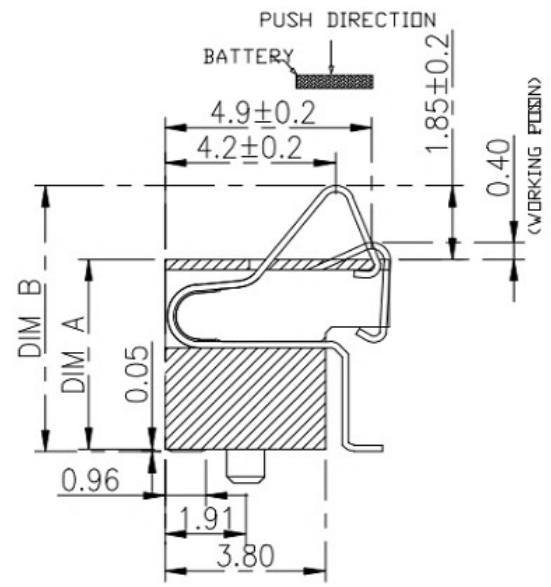

性能：
额定电流：3.0A
额定电压：24V
耐电压：500V
接触电阻：30mΩ MAX
绝缘电阻：500MΩ
工作温度：-40℃~+85℃
塑件（材质）：LCP，耐高温260℃
接触点（材质）：铜合金，触点镀金3U'

ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市高迪电子有限公司			
DECIMALS:		ANGLES:		DWG NO.		PART NAME:	
DIM	TOL	DIM	TOL	DESIGN:		PART NO.	
X.	±0.50	X.	±2°	CHECK:		REV.	UNIT:
X.X	±0.30	X.X	±1°	APPROVED		A	mm
X.XX	±0.20	X.XX	---			SHEET:	
X.XXX	±0.10	X.XXX	---			1/1	