
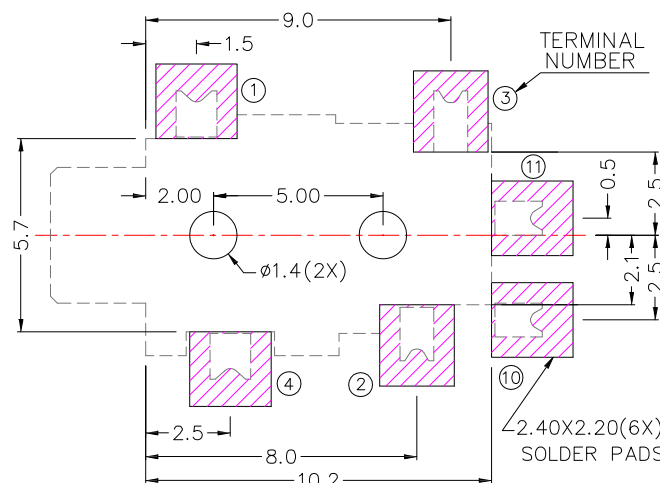
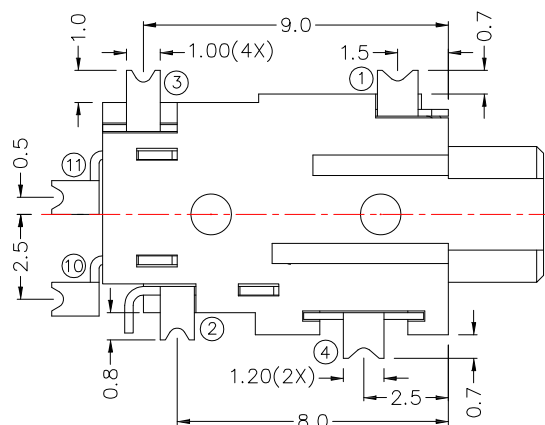

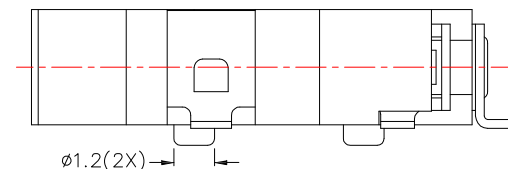
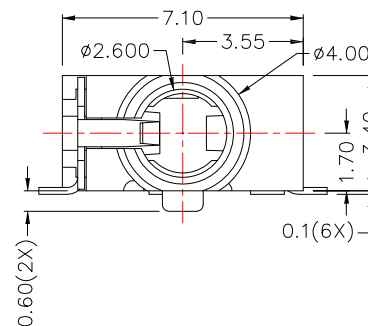


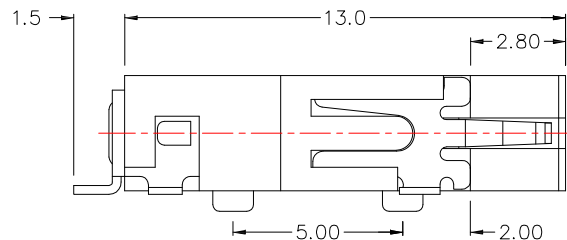


RECOMMENDED
SOLDER PAD LAYOUT

SPECIFICATION

- 1.Rating :DC 12V 1.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

*MATERIAL

TERMINAL 1 :PHOSPHOR BRONZE
TERMINAL 2 :PHOSPHOR BRONZE
TERMINAL 3 :PHOSPHOR BRONZE
TERMINAL 4 :PHOSPHOR BRONZE
TERMINAL 10:BRASS
TERMINAL 11:BRASS
HOUSING :PA6T



MODEL NO.	PJ-2796D	PJ-2795AD	PJ-2795BD	PJ-2795D	PJ-2794D
SCHEMATIC					



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 11/04/15

CHECKED BY: Jacky Chen
DATE: 11/04/15

APPROVED BY: Tony Kao
DATE: 11/04/15

MAT'L	FINISH	SCALE	TITLE	JACK
		1 : 1	MODLE	PHONE JACK
		DWG NO.	PJ-279xD	SIZE
		PART NO.	PJ-279xD	VER
				A1