





REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

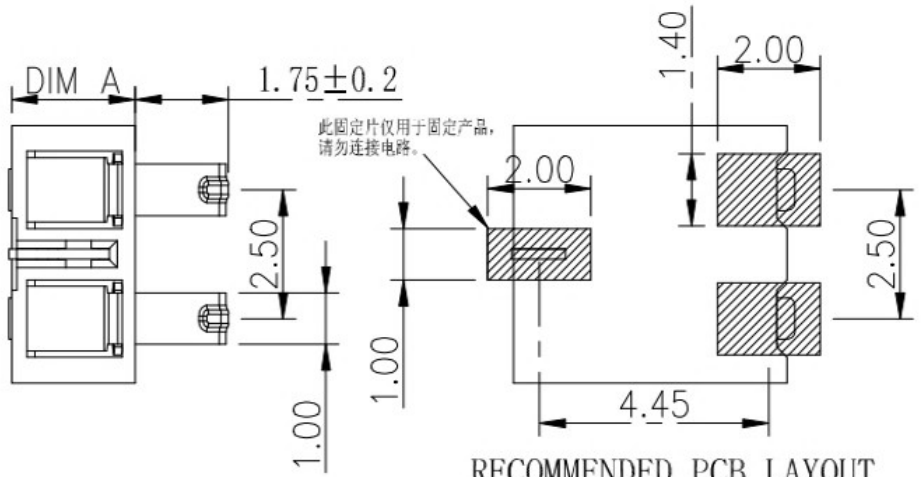

RECOMMENDED PCB LAYOUT
TOP VIEW(. XX±0.05)



DIM A	DIM B
2.4	4.2
3.0	4.8
3.5	5.3

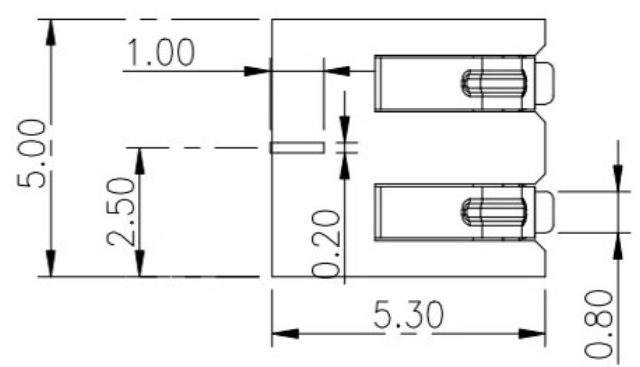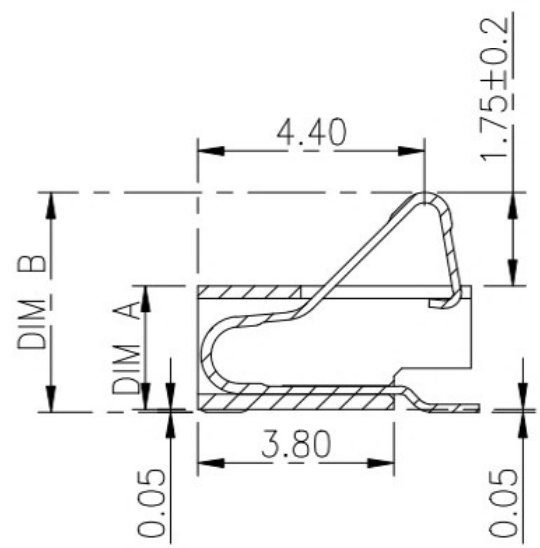

性能:
额定电流: 3.0A
额定电压: 24V
耐电压: 500V
接触电阻: 30mΩ MAX
绝缘电阻: 500MΩ
工作温度: -40℃~+85℃
塑件(材质): LCP, 耐高温260℃
接触点(材质): 铜合金, 触点镀金3U'

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市高迪电子有限公司

DECIMALS:	ANGLES:	DWG NO.	PART NAME:
DIM	TOL	DESIGN:	PART NO.
X.	±0.50	CHECK:	
X.X	±0.30	APPROVED	
X.XX	±0.20		REV. A
X.XXX	±0.10		UNIT: mm
			SHEET: 1/1