

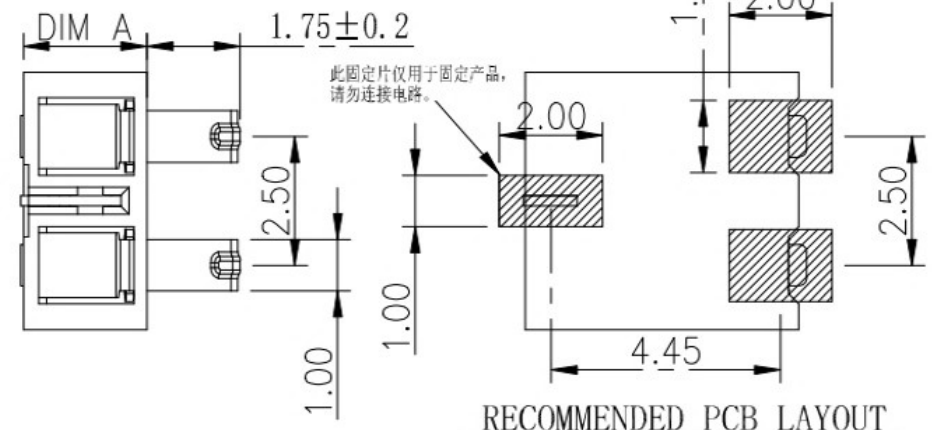
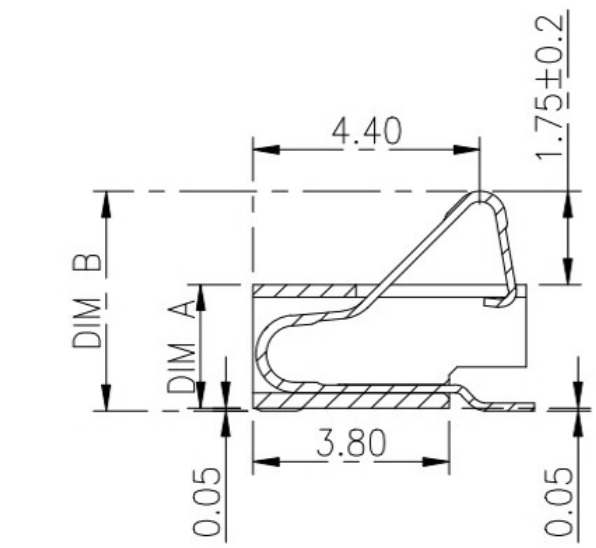


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29



RECOMMENDED PCB LAYOUT
TOP VIEW (. XX±0.05)

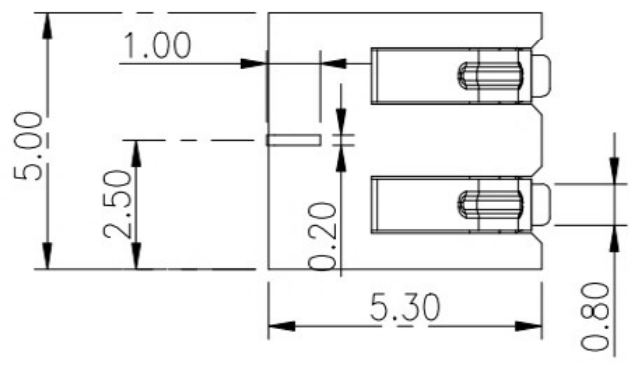

性能:
 额定电流: 3.0A
 额定电压: 24V
 耐电压: 500V
 接触电阻: 30mΩ MAX
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP, 耐高温260℃
 接触点(材质): 铜合金, 触点镀金3U'

DIM A	DIM B
2.4	4.2
3.0	4.8
3.5	5.3

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS:

DIM	TOL
X.	±0.50
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10

ANGLES:

DIM	TOL
X.	±2°
X.X	±1°
X.XX	-----
X.XXX	-----

DWG NO.

DESIGN:

CHECK:

APPROVED

PART NAME:

PART NO.

REV. A

UNIT: mm

SHEET: 1/1

东莞市高迪电子有限公司

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK