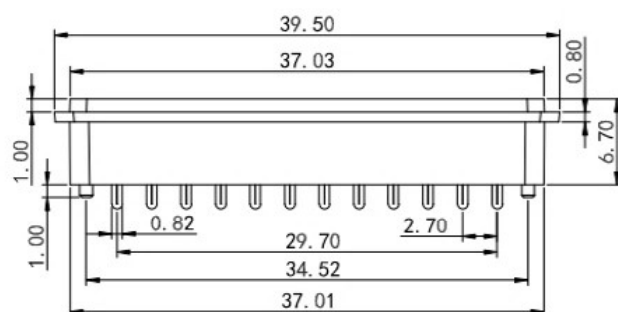
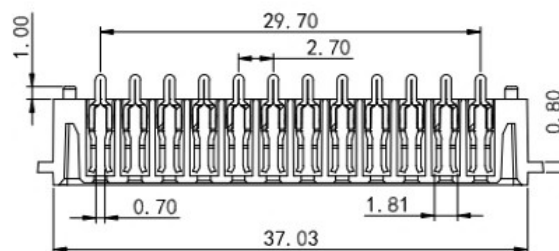
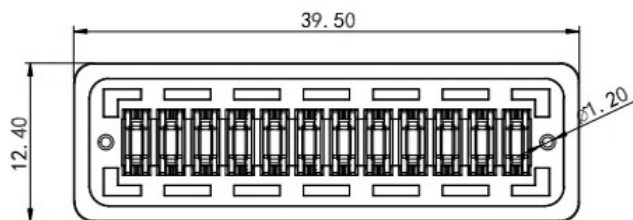


RECOMMENDED PCB LAYOUT
T=0.65MM, TOLERANCES $\pm$ 0.05MM

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Rated voltage: 12V 30V

Current rating: 5A 10A

instant CURRENT:12A

Contact Resistance:30M Ω

Insulation Resistance:100M Ω

Dielectric Voltage:1000V

Operdting Temperature:-40 $^{\circ}$ ~105 $^{\circ}$

UNLESS OTHERWISE
SPECIFED TOLERANCES

东莞市高迪电子有限公司

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	$\pm$ 0.50	X.	$\pm$ 2 $^{\circ}$
X.X	$\pm$ 0.30	X.X	$\pm$ 1 $^{\circ}$
X.XX	$\pm$ 0.20	X.XX	----
X.XXX	$\pm$ 0.10	X.XXX	----

DWG NO.		PART NAME:	
DESIGN:		PART NO.	
CHECK:		REV. UNIT: SHEET:	
APPROVED		A mm	1/1

②	HOUSING	1	LCP	BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION