
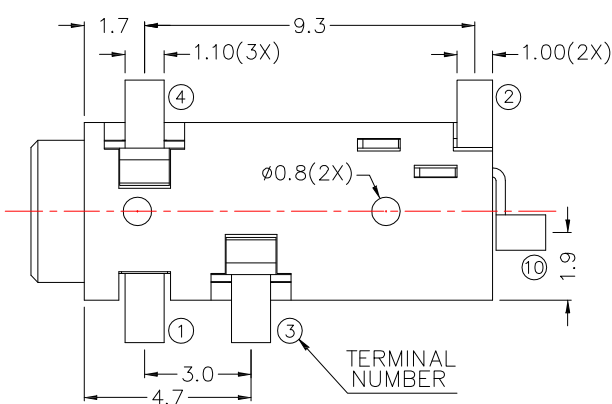


***MATERIAL**


- TERMINAL 1 : PHOSPHOR BRONZE
- TERMINAL 2 : PHOSPHOR BRONZE
- TERMINAL 3 : PHOSPHOR BRONZE
- TERMINAL 4 : PHOSPHOR BRONZE
- TERMINAL 10 : BRASS
- HOUSING : PA6T

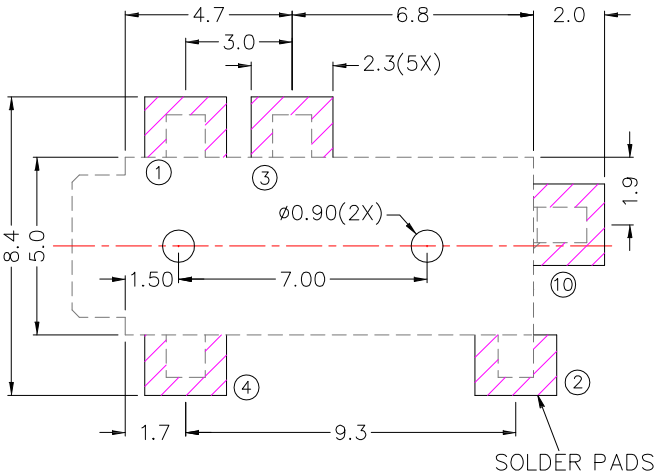

SPECIFICATION

- 1. Rating : DC 12V 1.0A
- 2. Contact resistance : $\leq 50m\Omega$
- 3. Insulation resistance : $\geq 100M\Omega$
- 4. Withstand voltage : 500VAC
- 5. Insertion and extraction force : 3-30N
- 6. Life test : 5,000 cycles

**RECOMMENDED
SOLDER PAD LAYOUT**



2.5 MATE PLUG

MODEL NO.	PJ-2765D	PJ-2764D	PJ-2764AD
SCHEMATIC			

1	新增SPEC	Jack	110315
ITEM NO.	DESCRIPTION	DRAWN	DATE

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/03/15			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	11/03/15			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-276xD
Tony Kao	11/03/15	1 : 1		
SHEET NO.	1 of 1	PART NO.	PJ-276xD	
				SIZE A4
				VER R1