





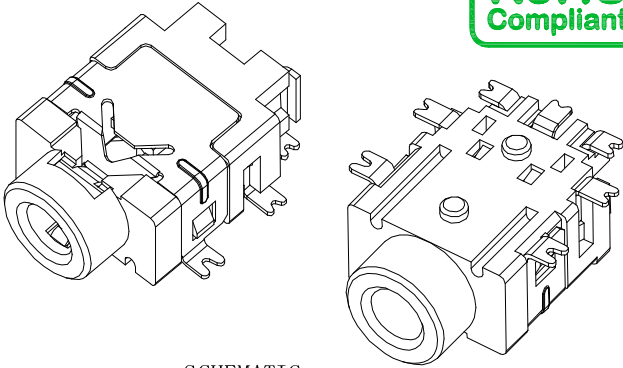


SCHEMATIC

PJ-2706D	PJ-2704D	PJ-2705D

SPECIFICATION

- 1.Rating : DC 30V , 1.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

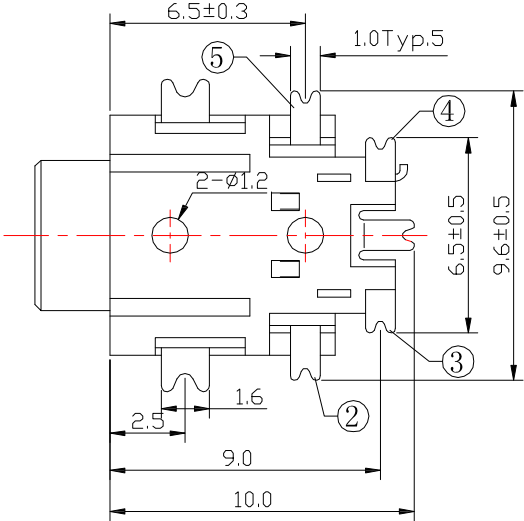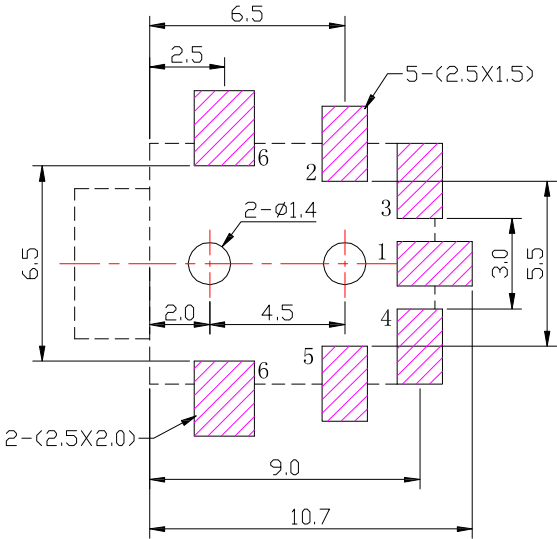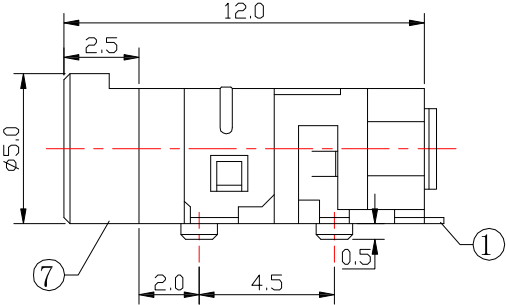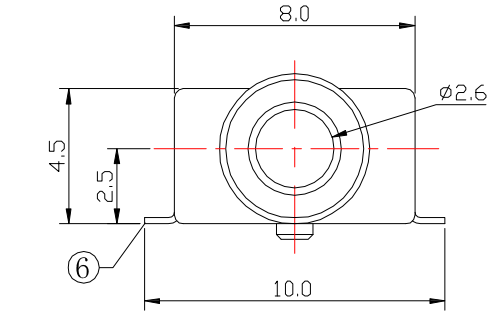

PCB LAYOUT MOUNTING PATTERN
TOP VIEW

⑦	HOUSING	1	PA9T	
⑥	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
⑤	5# CONTACT FOOT	1	SUS	Ag-Plating
④	4# CONTACT FOOT	1	BRASS	Ag-Plating
③	3# CONTACT FOOT	1	BRASS	Ag-Plating
②	2# CONTACT FOOT	1	SUS	Ag-Plating
①	1# CONTACT FOOT	1	SUS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

DATE

Jack Lu

01/24/17

CHECKED BY:

DATE

Jacky Chen

01/24/17

APPROVED BY:

DATE

Tony Kao

01/24/17

MAT'L

TITLE

JACK

FINISH

MODLE

PHONE JACK

SCALE

1 : 1

DWG NO.

PJ-270xD-S125

SIZE

A4

SHEET NO.

1 of 1

PART NO.

PJ-270xD-S125

VER

A0

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

DATE

Jack Lu

01/24/17

CHECKED BY:

DATE

Jacky Chen

01/24/17

APPROVED BY:

DATE

Tony Kao

01/24/17

MAT'L

TITLE

JACK

FINISH

MODLE

PHONE JACK

SCALE

1 : 1

DWG NO.

PJ-270xD-S125

SIZE

A4

SHEET NO.

1 of 1

PART NO.

PJ-270xD-S125

VER

A0