

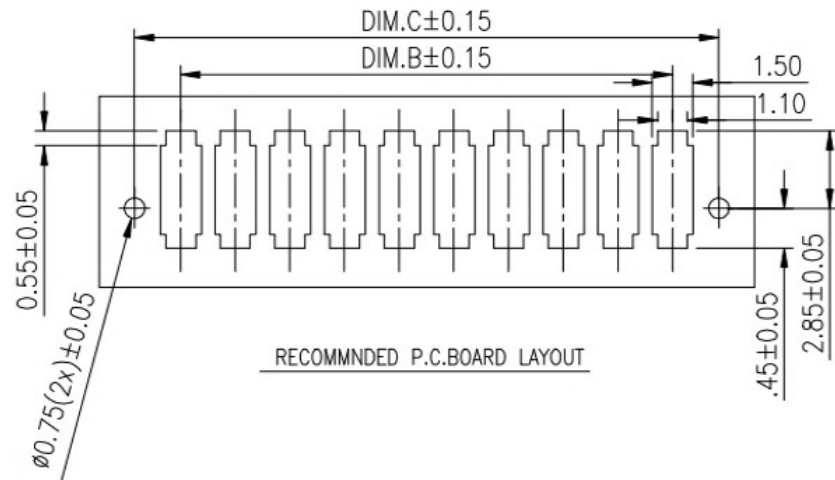
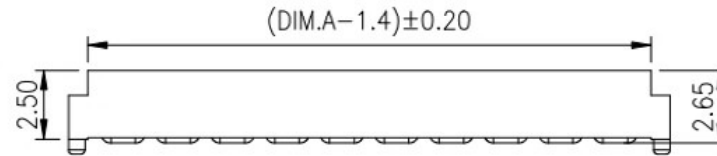
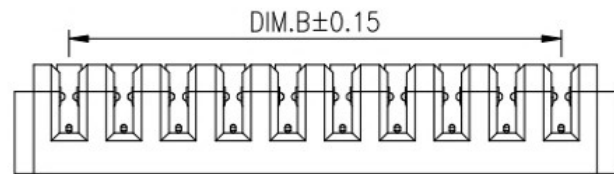
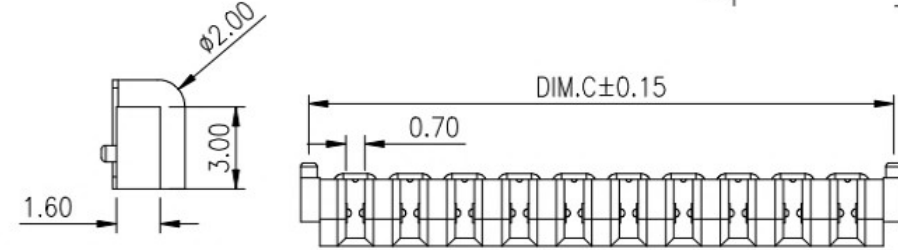


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

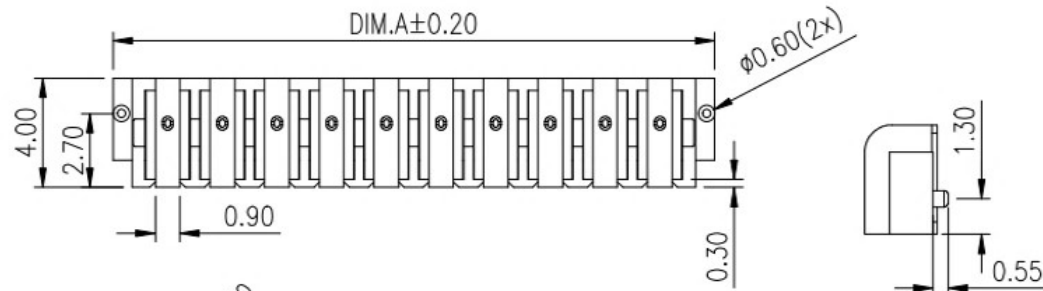

PIN	Dim.A	Dim.B	Dim.C
02pin	6.00	2.00	5.40
03pin	8.00	4.00	7.40
04pin	10.00	6.00	9.40
05pin	12.00	8.00	11.40
06pin	14.00	10.00	13.40
07pin	16.00	12.00	15.40
08pin	18.00	14.00	17.40
09pin	20.00	16.00	19.40
10pin	22.00	18.00	21.40

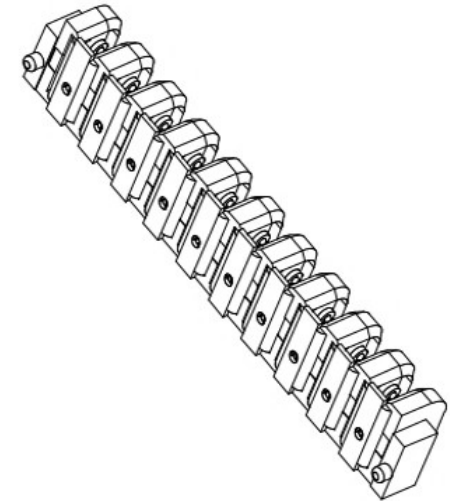

NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Rated voltage: 12V 30V

Current rating: 3A 5A

instant CURRENT:7A

Contact Resistance:30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:1000V

Operdting Temperature:-40°~105°

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:

ANGLES:

DIM

TOL

DIM

TOL

X. ±0.50

X. ±2°

X.X ±0.30

X.X ±1°

X.XX ±0.20

X.XX ---

X.XXX ±0.10

X.XXX ---

DWG NO.

DESIGN:

CHECK:

APPROVED

PART NAME:

PART NO.

REV.


UNIT:

SHEET:

A

mm

1/1



②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T		Au PLATED
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK

东莞市高迪电子有限公司