

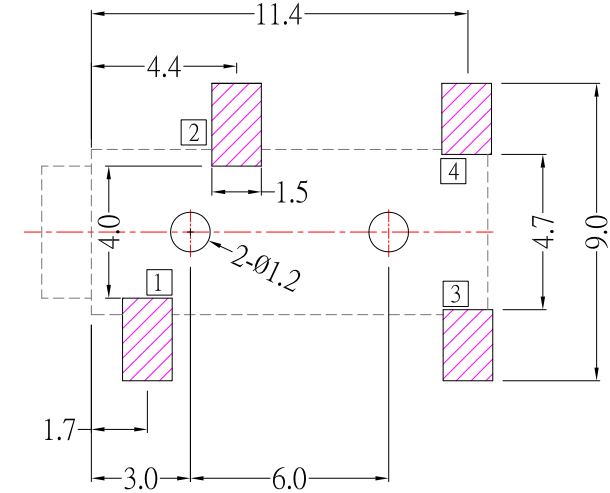


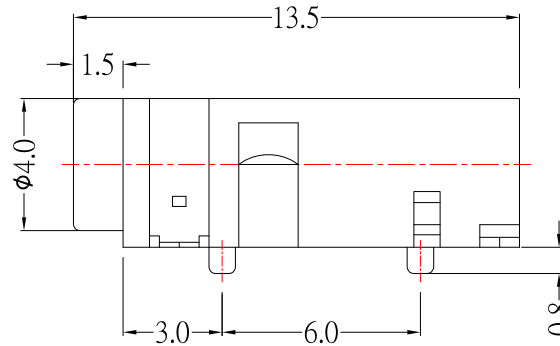


P.C.B LAYOUT MOUNTING PATTERN (TOP VIEW)

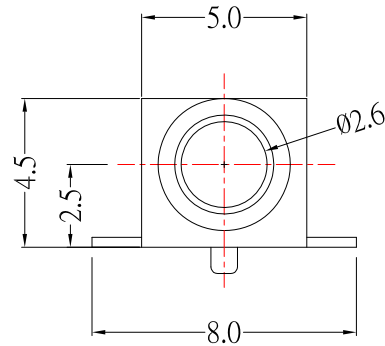

SCHEMATIC

PJ-2574-S125	PJ-2573-S125	PJ-2573A-S125

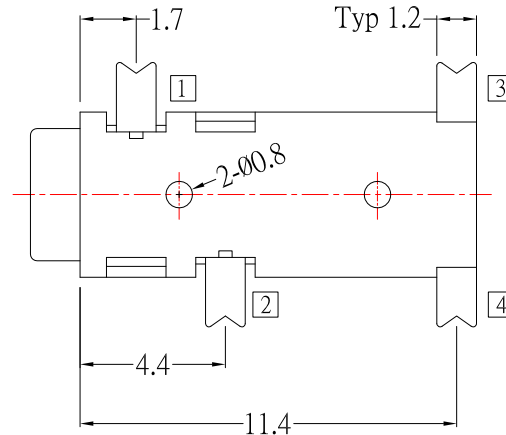

SPECIFICATION

- Rating : DC 30V 0.5A
- Contact resistance : $\leq 30\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V)
- Withstand voltage : 250VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/17/14			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	01/17/14			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-257x-S125
Tony Kao	01/17/14	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-257x-S125
				SIZE A4
				VER R1