
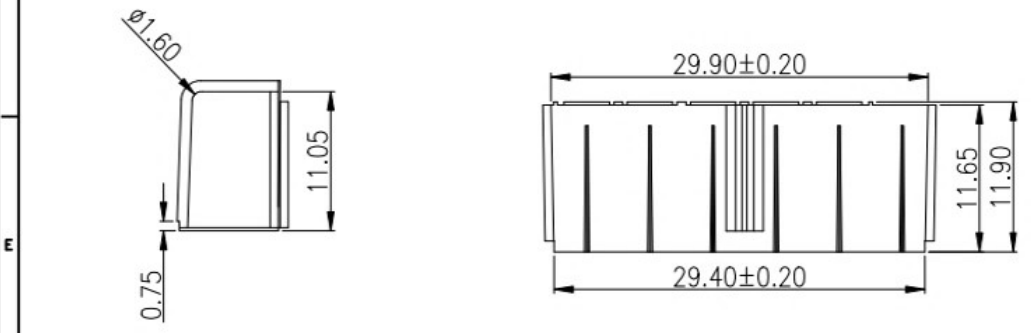
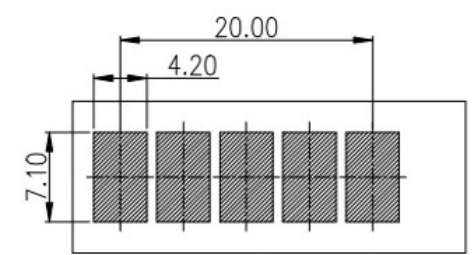


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

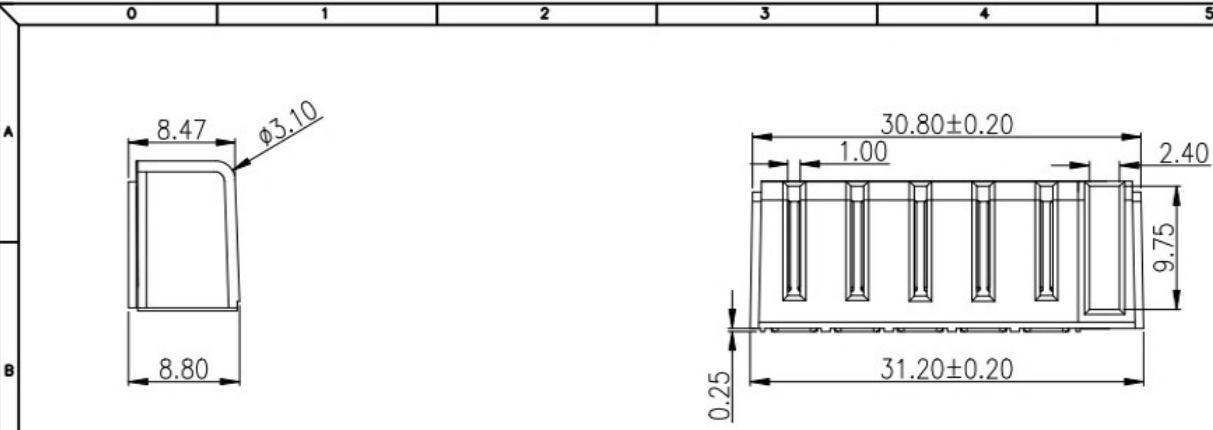

NOTE:
Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Rated voltage: 12V 30V
Current rating: 3A 5A
instant CURRENT:7A
Contact Resistance:30M Ω
Insulation Resistance:100M Ω
Dielectric Voltage:1000V
Operrting Temperature:-40 $^{\circ}$ ~105 $^{\circ}$

UNLESS OTHERWISE SPECIFIED TOLERANCES						东莞市高迪电子有限公司			
DECIMALS:		ANGLES:		DWG NO.		PART NAME:			
DIM	TOL	DIM	TOL	DESIGN:		PART NO.			
X.	± 0.50	X.	$\pm 2^{\circ}$	CHECK:		REV.			
X.X	± 0.30	X.X	$\pm 1^{\circ}$	APPROVED		A	UNIT:	SHEET:	
X.XX	± 0.20	X.XX				mm	1/1		
X.XXX	± 0.10	X.XXX							

②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK