

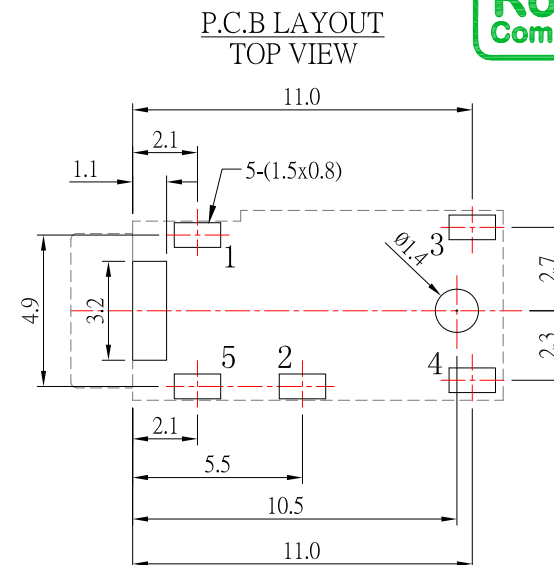
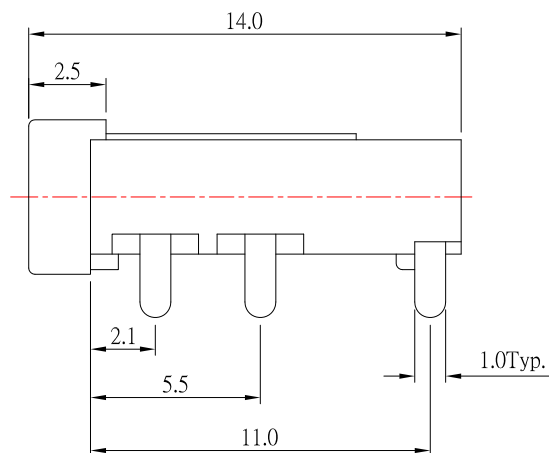
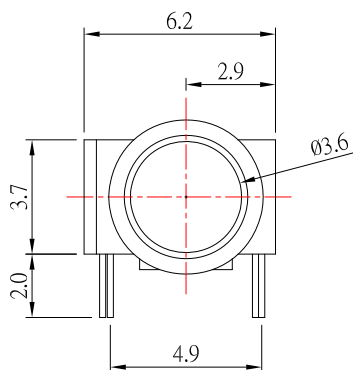


1. Rating : DC 30V 1.0A ;
2. Contact resistance : $\leq 50\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
4. Withstand voltage : 250VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles °

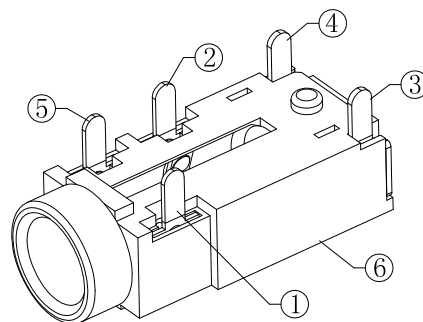

6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	Ag-Plating
3	3# CONTACT FOOT	1	SUS301	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	09/16/14					
CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK	
Jacky Chen	09/16/14					
		SCALE	1 : 1	DWG NO.	PJ-D3081A-S125	SIZE A4
APPROVED BY:	DATE					
Tony Kao	09/16/14	SHEET NO.	1 of 1	PART NO.	PJ-D3081A-S125	VER R1

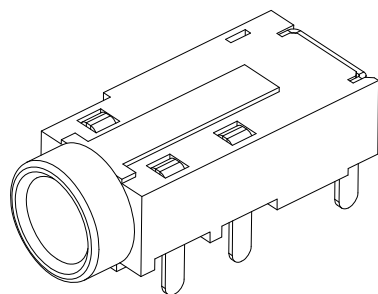

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

1
ITEM NO