
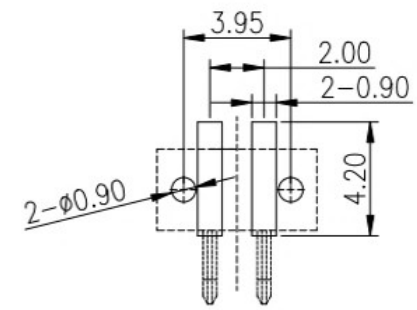





| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
|------|---------|-------------|--------|------------|
| A    |         | INITIAL     | Kai    | 2018.03.29 |



RECOMMENDED P.C.B LAYOUT  
TOP VIEW (.XX±0.05)

NOTE:  
Material  
Insulator:Nylon 9T(UL94V-0)  
Contact:phosphor Bronze  
Contact Plated:Gold over Nickel or Tin  
Specification  
Rated voltage: 12V 30V  
Current rating: 3A 5A  
instant CURRENT:7A  
Contact Resistance:30MΩ  
Insulation Resistance:100MΩ  
Dielectric Voltage:1000V  
Operdting Temperature:-40°~105°

| UNLESS OTHERWISE SPECIFIED TOLERANCES |       |         |     | 东莞市高迪电子有限公司 |            |       |        |
|---------------------------------------|-------|---------|-----|-------------|------------|-------|--------|
| DECIMALS:                             |       | ANGLES: |     | DWG NO.     | PART NAME: |       |        |
| DIM                                   | TOL   | DIM     | TOL | DESIGN:     | PART NO.   |       |        |
| X.                                    | ±0.50 | X.      | ±2° | CHECK:      | REV.       | UNIT: | SHEET: |
| X.X                                   | ±0.30 | X.X     | ±1° | APPROVED    | A          | mm    | 1/1    |
| X.XX                                  | ±0.20 | X.XX    | --- |             |            |       |        |
| X.XXX                                 | ±0.10 | X.XXX   | --- |             |            |       |        |

| ②    | HOUSING   | 1    | LCP                   | BLACK       |        |
|------|-----------|------|-----------------------|-------------|--------|
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |
| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |