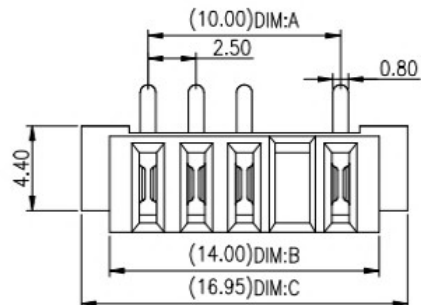
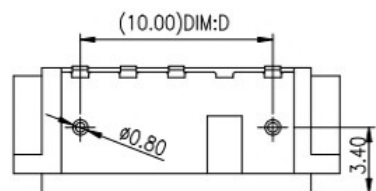


Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

No:of pins	Dimension				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
03	7.50	11.50	14.45	7.50	2.20
04	10.00	14.00	16.95	10.00	2.20
05	12.50	16.50	19.45	12.50	2.20
06	15.00	19.00	21.95	15.00	2.20
07	17.50	21.50	24.45	17.50	2.20
08	20.00	24.00	26.95	20.00	2.20
09	22.50	26.50	29.45	22.50	2.20
10	25.00	29.00	31.95	25.00	2.20

NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Current rating:3A 5A

instant CURRENT:7A

Contact Resistance:30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:500V

Operdting Temperature:-40°~105°

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市高迪电子有限公司

DECIMALS: ANGLES:

DWG NO. PART NAME:

DIM TOL DIM TOL

DESIGN: PART NO.

X. ±0.50 X. ±2°

CHECK:

X.X ±0.30 X.X ±1°

APPROVED

X.XX ±0.20 X.XX ---

REV. UNIT: SHEET: 1/1

X.XXX ±0.10 X.XXX ---

A mm

②	HOUSING	1	LCP	BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION
				REMARK