

MODEL NO.:

PJR-D3145B-ABK7AS0*L-RH

(1) (2) (3) (4) (5) (6)

(1) Series no.

(2) Schematic type: A

(3) Housing color:

BK7=Black




(4) Terminal plating:

AS0*=Plating Tin/Au 1"/5U" min.

(5) Packing mode:L=Reel packing

(6) Environmental requirements:

Rh=RoHS 2.0 + Halogen Free

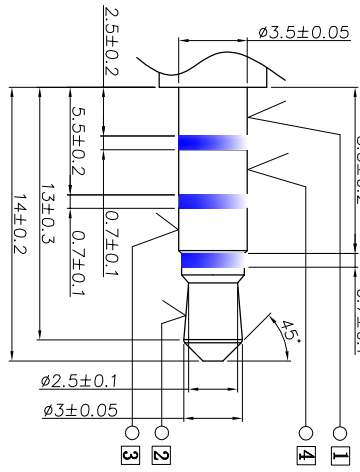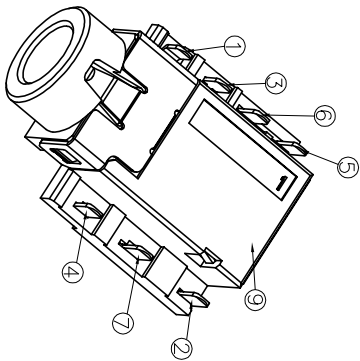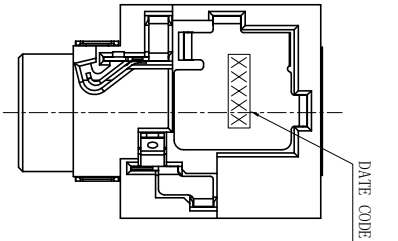

Matching Plug



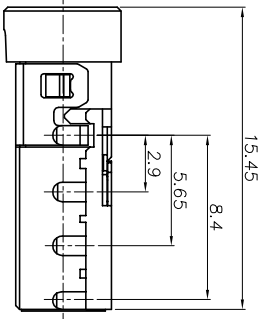




TABLE:

2	PJ-D3145B-ABK7AS02L-RH	半金锡1U"
1	PJ-D3145B-ABK7AS04L-RH	半金锡5U"
序号	适用物料编码	物料说明

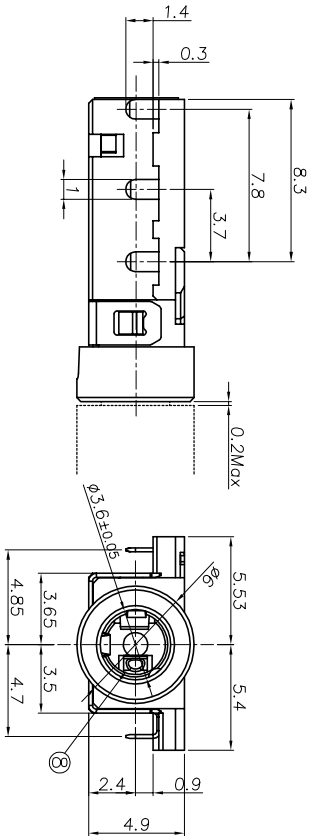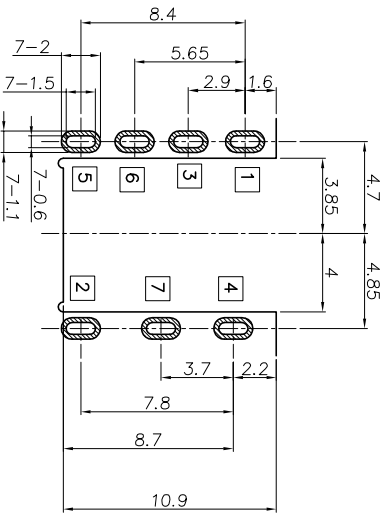

RECOMMENDED P.C.B LAYOUT(≠1.0mm)
TOP VIEW (TOLERANCE: ±0.05)

- SPECIFICATION:
- Electrical characteristics
 - Current rating:DC 0.5A max.
 - Voltage rating:DC 30V.
 - Contact resistance:50mΩ max.
 - Insulation resistance:100MΩ min. at 500V DC.
 - Withstanding voltage:500V AC for 1 minute.
 - Mechanical characteristics
 - Life test:5000 cycles min,
 - Mating force:3~30N,
 - Umating force:3~30N.

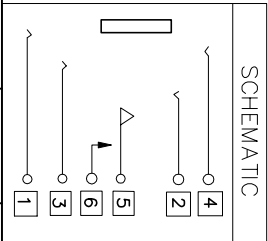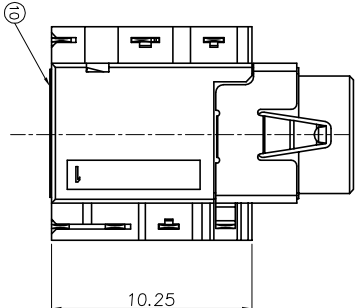

10	Mylar	1	Kapton	Yellow
9	Housing	1	HIGH TEMPERATURE PLASTIC	Black
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Black
7	Shell	1	Stainless steel 0.20t	
6	Shunt terminal	1	Phosphor bronze, 0.20t	Gold Finish/5U" On Solder Tail Area And on Solder Tail Area,All over Nickel Plated
5	Transfer Spring	1	Phosphor bronze, 0.20t	
4	Ring spring	1	Phosphor bronze, 0.20t	
3	Ring spring	1	Phosphor bronze, 0.20t	
2	Tip spring	1	Phosphor bronze, 0.25t	Gold Finish/5U" On Solder Tail Area 1in Plating Area 1in on Solder Tail Area, All over Nickel Plated
1	Earth spring	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

东莞市高迪电子有限公司

TITLE: Ø3.5mm PHONE JACK

MODEL NO. PJR-D3145B-ABK7AS0*L-RH

FILE NO. Q/SSY-QM-001A-0549