

MODEL NO.:

PJR-D3145R-ABK7AS02L-RH

(1) (2) (3) (4) (5) (6)

(1) Series no.

(2) Schematic type: A

(3) Housing color: A

BK7=Black







(4) Terminal plating:

AS02=Plating Tin/Au 1" min.

(5) Packing mode:L=Reel packing

(6) Environmental requirements:

Rh=RoHS 2.0 + Halogen Free

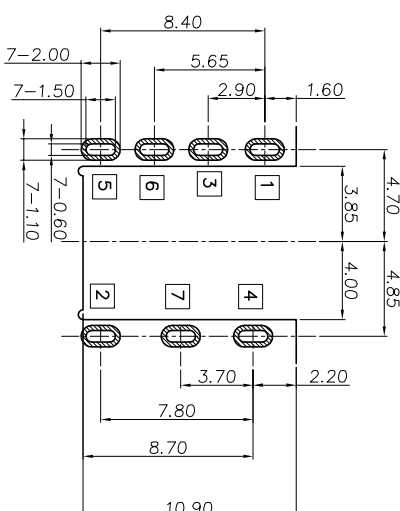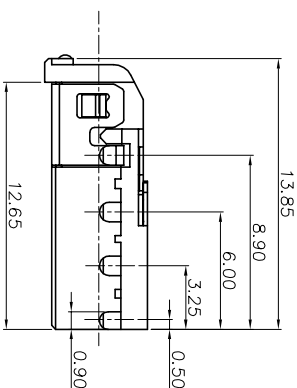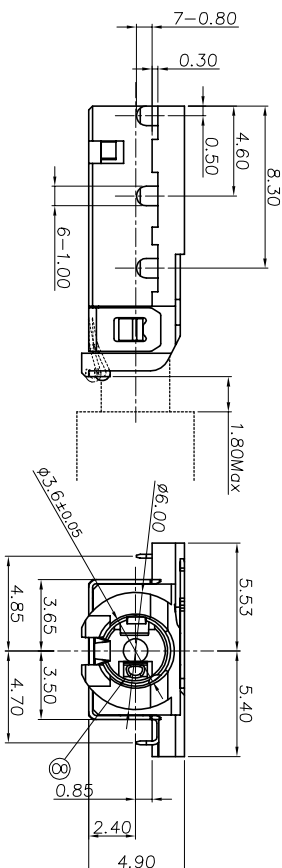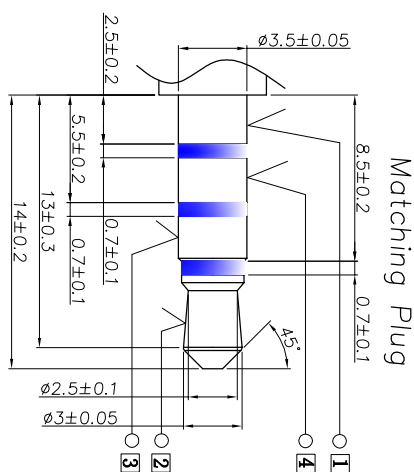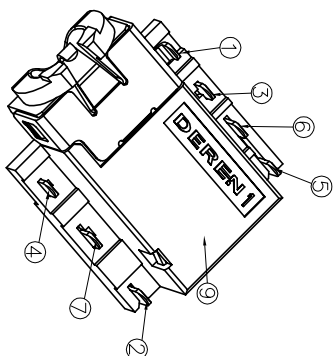

SPECIFICATION:

1. Electrical characteristics

1-1. Current rating:DC 0.5A max.

1-2:Voltage rating:DC 30V.

1-3:Contact resistance:50mΩ max.

1-4. Insulation resistance:100MΩ min. at 500V DC.



1-5. Withstanding voltage:500V AC for 1 minute.

2. Mechanical characteristics

2-1. Life test:5000 cycles min,

2-2. Mating force:3~30N,

Umating force:3~30N.



NO.	DESCRIPTION	QTY	MATERIAL	REMARK
9	Housing	1	HIGH TEMPERATURE PLASTIC	Black
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Black
6	Shunt terminal	1	Phosphor bronze, 0.20t	Gold Plating on Contact Area, Nickel Underplated
5	Transfer Spring	1	Phosphor bronze, 0.20t	Nickel Plating
7	Shell	1	Phosphor bronze, 0.20t	Nickel Plating
4	Ring spring	1	Phosphor bronze, 0.20t	Gold Plating on Contact Area, Nickel Underplated
3	Tip spring	1	Phosphor bronze, 0.20t	Gold Plating on Contact Area, Nickel Underplated
2	Tip spring	1	Phosphor bronze, 0.20t	Gold Plating on Contact Area, Nickel Underplated
1	Earth spring	1	Phosphor bronze, 0.20t	Gold Plating on Contact Area, Nickel Underplated

东莞市高迪电子有限公司

TITLE: φ3.5mm PHONE JACK

MODEL NO. PJR-D3145R-ABK7AS02L-RH

FILE NO. Q/DY-QW-001A-0616