
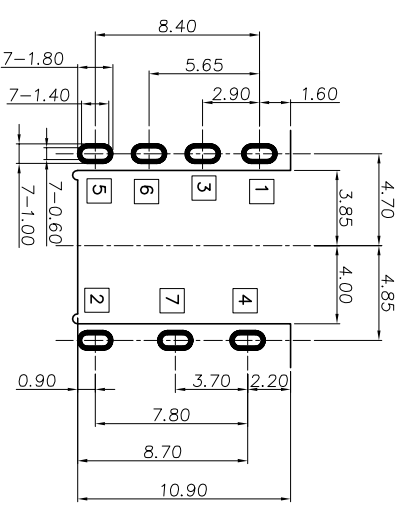

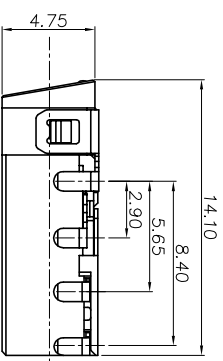
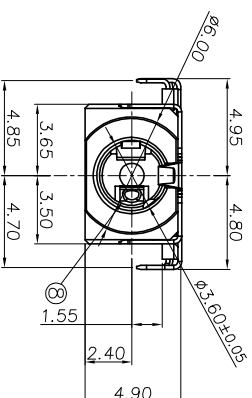
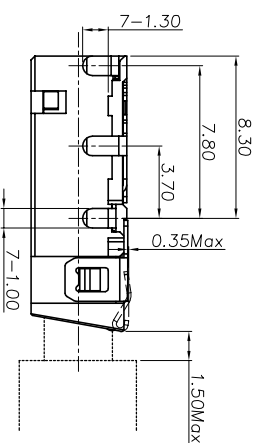
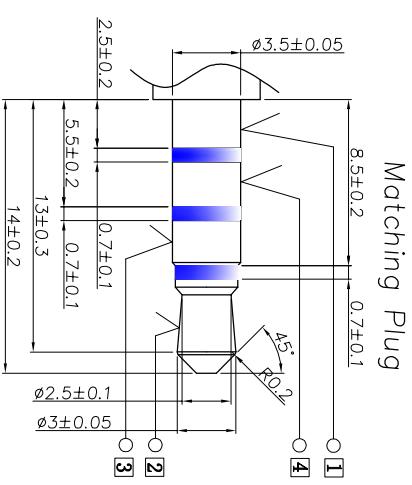



PJR-D3145Z-ABK7AS02L-RH



- DATE CODE
YYMMDD X
年周日线别



RECOMMENDED P.C.B LAYOUT (t=1.0mm)
TOP VIEW (TOLRANCE: ±0.05)

1. Electrical characteristics

- 1-1. Current rating: DC 0.5A max.
- 1-2. Voltage rating: DC 30V.
- 1-3. Contact resistance: $50\text{m}\Omega$ max.
- 1-4. Insulation resistance: $100\text{M}\Omega$ min.
at 500V DC.
- 1-5. Withstanding voltage: 500V
AC for 1 minute.
2. Mechanical characteristics
- 2-1. Life test: 5000 cycles min,
- 2-2. Mating force: $3\sim 30\text{N}$,
- Unmating force: $3\sim 30\text{N}$.



NO.	DESCRIPTION	QTY	MATERIAL	REMARK
9	Housing	1	PA10T 308G/F Ulg4 V-0	Block
8	Insulator	1	PA10T 308G/F Ulg4 V-0	Block
6	Shunt terminal	1	C5210-EH, 0.20t	Gold Flash On Contact And Solder Tail Area, Nickel Underplated
5	Transfer Spring	1	C5210-EH, 0.20t	
7	Shell	1	C5210-EH, 0.20t	Nickel Plated
4	Ring spring	1	C5210-EH, 0.20t	
3	Ring spring	1	C5210-EH, 0.20t	Gold Flash On Contact And Solder Tail Area, Nickel Underplated
2	Tip spring	1	C5210-EH, 0.20t	
1	Earth spring	1	C5210-EH, 0.20t	All over Nickel plated

东莞市高迪电子有限公司

东莞市高迪电子有限公司									
CUSTOMER DRAWING		TITLE:		φ3.5mm PHONE JACK					
MODEL NO.		PJR-B3145Z-ABKAS02L-RH							
FILE NO.		Q/DY. QM-001A-0701							
SHEET:1 of 1									
2019.07.07		罗振强		DESIGN		Angle			
				CHECK		.x			
				APPROVAL		.xx ±0.25			
						.xxx ±0.20			
A-0		罗振强		刘伟		GENERAL TOLERANCE UNLESS OTHERWISE NOTED			
2019.07.07		NEW		DESCRIPTION		CHANGE APPRO.			
REV		DATE		DESCRIPTION		CHANGE APPRO.			
ECN NO.		REV		DATE		DESCRIPTION			