
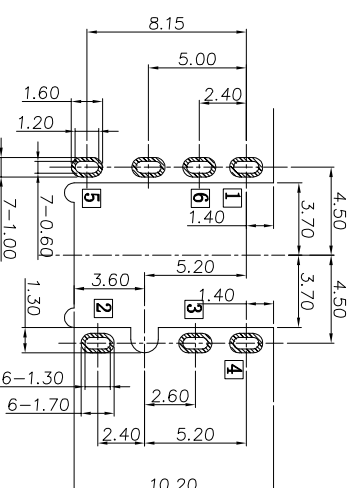
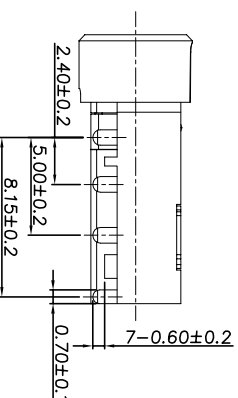
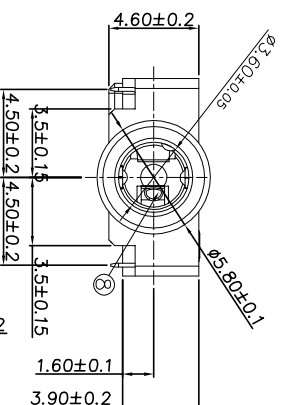
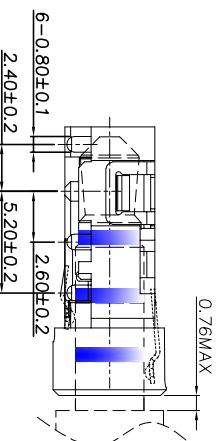
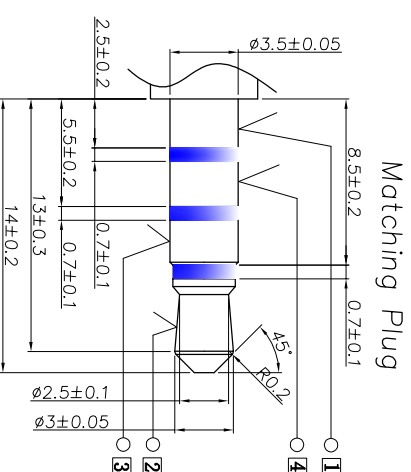



PJR-D3261I-ABK7AU06L-RH

- 
- Technical drawing of a mechanical assembly, likely a pipe or duct connection. The drawing shows a cross-section of a pipe with a flange. A bolted connection is shown on the right side, with a bolt passing through the flange and the pipe. The drawing is a technical sketch, showing the internal structure and the connection details.

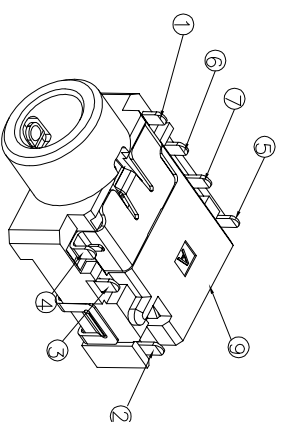

## 1. Electrical characteristics

- 
- Technical drawing of a mechanical assembly, likely a valve or actuator, showing a cross-section. The drawing includes the following dimensions and labels:
- Top horizontal dimension:  $\pm 0.2$
  - Left vertical dimension:  $10.10 \pm 0.2$
  - Internal vertical dimension:  $1.30$
  - Bottom horizontal dimension (left):  $10.30 \pm 0.2$
  - Bottom horizontal dimension (right):  $3.45 \pm 0.2$
  - Label 'A' is placed near the bottom left of the assembly.



| NO. | DESCRIPTION     | QTY | MATERIAL                    | REMARK                                                                    |
|-----|-----------------|-----|-----------------------------|---------------------------------------------------------------------------|
| 9   | Housing         | 1   | PA10T R630NH+30%OF UL 94V-0 | Black                                                                     |
| 8   | Insulator       | 1   | PA10T R630NH+30%OF UL 94V-0 | Black                                                                     |
| 7   | shell           | 1   | Phosphor bronze, 0.20t      | 40% Nickel Plated                                                         |
| 6   | Shunt terminal  | 1   | Phosphor bronze, 0.20t      | Gold Fin on Contact Area and Solder Tail Area, All over 80% Nickel Plated |
| 5   | Transfer Spring | 1   | Phosphor bronze, 0.20t      |                                                                           |
| 4   | Ring spring     | 1   | Phosphor bronze, 0.20t      | Al <sub>2</sub> O <sub>3</sub> On Contact Area                            |
| 3   | Ring spring     | 1   | Phosphor bronze, 0.20t      | Gold Fin on Solder Tail Area                                              |
| 2   | Tip spring      | 1   | Phosphor bronze, 0.20t      |                                                                           |
| 1   | Earth spring    | 1   | Phosphor bronze, 0.20t      | All over 80% Nickel Plated                                                |

东莞市高迪电子有限公司

[illegible]