

PJR-D3261L-ABK7AS02L-RH

(1) Series no.

(2) Schematic type: A

(3) Housing color:








BK7=Black

(4) Terminal plating:

AS02=Plating Tin/Gold flash.

(5) Packing mode:L=Reel packing

(6) Environmental requirements:

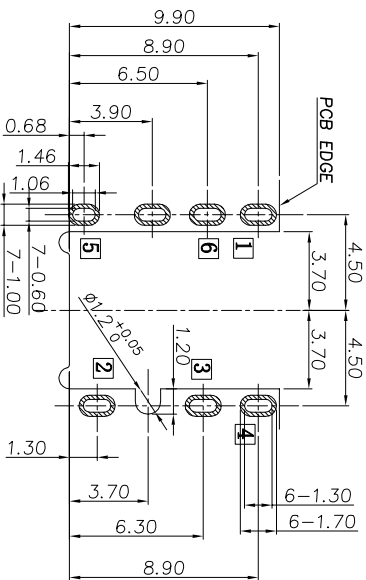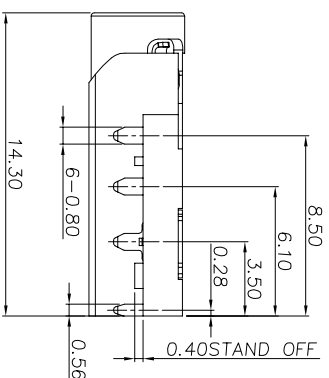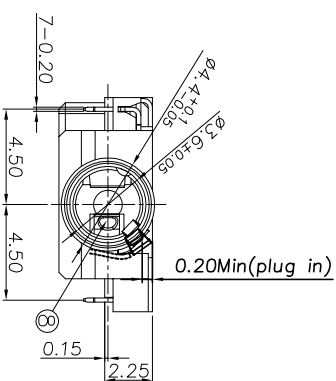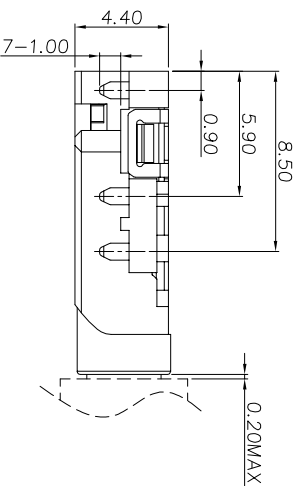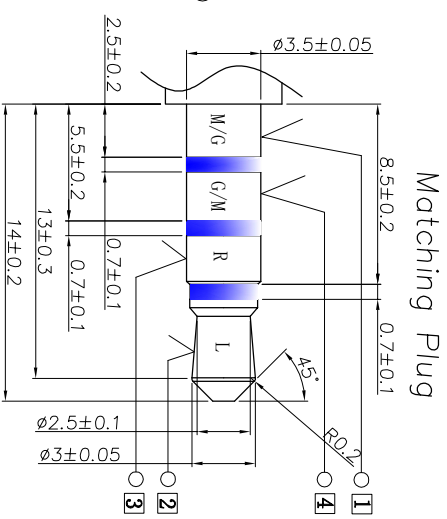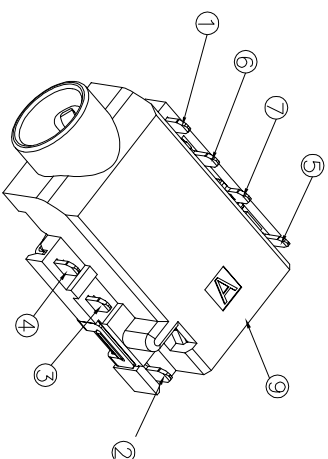

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE: ± 0.05)

1. Electrical characteristics

1. Electrical characteristics

1-1. Current rating: DC 1.0A max.

1-2: Voltage rating: DC 12V.

1-3:Contact resistance:50m Ω max.

1-4. Insulation resistance: 100M Ω min. at 500V DC.



1-5. Withstanding voltage: 500V AC for 1 minute.

2. Mechanical characteristics

2-1. Life test: 5000 cycles min,

2-2. Mating force: 3~30N.

Unmating force: 3~30N.

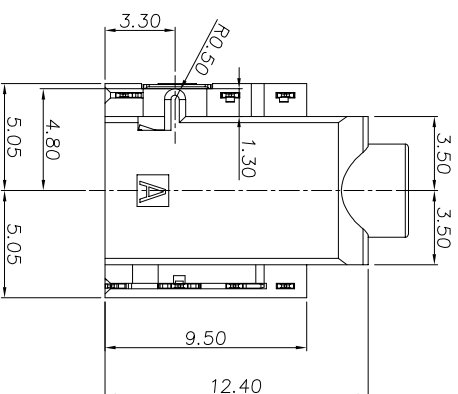

9	Housing	1	HIGH TEMPERATURE PLASTIC	Block
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Block
5	Transfer Spring	5	Phosphor bronze, 0.20t	Sold Piece On Contact Area, All over 50u" Nickel Plated
7	shell	1	Phosphor bronze, 0.20t	Plating Ni 50u"
6	Shunt terminal	6	Phosphor bronze, 0.20t	Gold Flash On Contact Area
4	Ring spring	4	Phosphor bronze, 0.20t	80u"monte tin
3	Ring spring	3	Phosphor bronze, 0.20t	Plating on Solder Tail
2	Tip spring	2	Phosphor bronze, 0.20t	Area, All over 50u"Nickel
1	Earth spring	1	Phosphor bronze, 0.20t	Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

东莞市高迪电子有限公司

东莞市高迪电子有限公司									
CUSTOMER DRAWING		TITLE:							
MODEL NO.		PJR-D3261L-ABK7AS02L-RH							
FILE NO.		Q/DY. QM-001A-0xxxx							
				SHEET: 1 of 1					
				A4		2018. 07. 30			
				UNIT:mm		罗振强			
SCALE: 1:1				APPROVAL		DESIGN			
						±2°			
						Angle			
						.x			
						±0.35			
						.xx			
						±0.25			
						.xxx			
CHANGE				罗振强		NEW			
APPRO.				李海腾					
DATE				2018. 07. 30		A-0			
REV									
ECN NO.									