

MODEL NO.:

PJR-D3261M - A BK7 AS02 L - RH

- (1) (2) (3) (4) (5) (6)

- (1) Series no.

- (2) Schematic type: A
(3) Housing color:

- BK7=Black







- (4) Terminal plating:

- AS02=Plating Tin/Gold Flash

- (5) Packing mode:L=Reel packing

- (6) Environmental requirements:

- Rh=RoHS 2.0 + Halogen Free

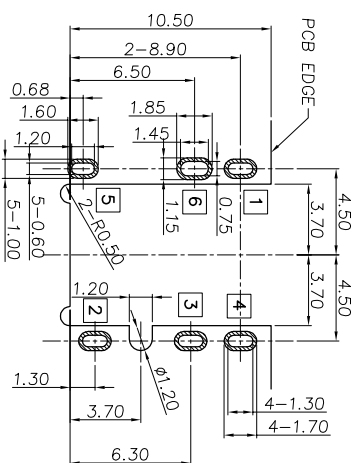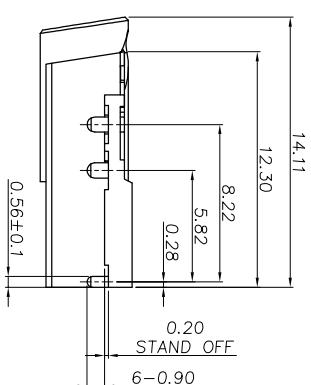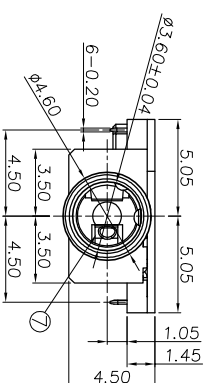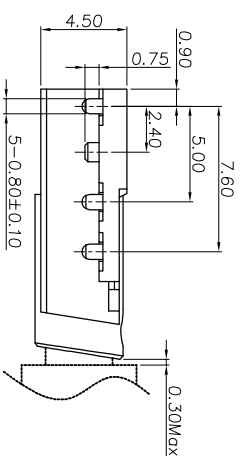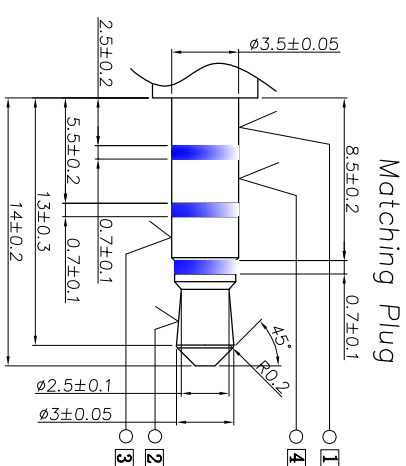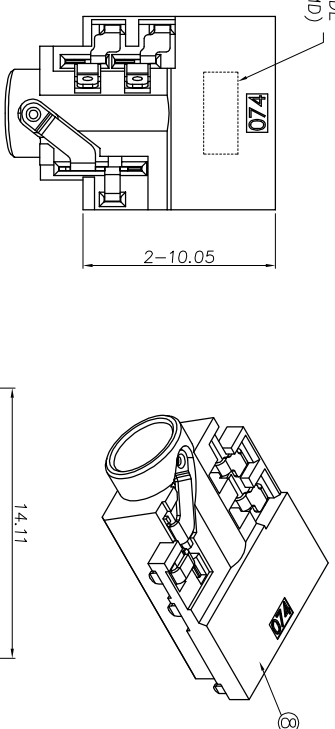

SPECIFICATION:

1. Electrical characteristics

- 1-1: Current rating: DC 1A
1-2: Voltage rating: DC 12V.

- 1-3:Contact resistance:50m Ω max.

- 1-5. Withstanding voltage: 500V AC for 1 minute



- ## 2. Mechanical characteristics

- 2-1. Insertion force: 8~30N, Initial

- 25N MAX. After the 2000th
2-2 Withdrawal force: 6-18N Initial

- 5N Min. After the 2000th

- 2.3. After life test Contact resistance: 100m Ω max.



NO.	DESCRIPTION	QTY	MATERIAL	REMARK
8	Housing	1	PA10TJLL94V-0	Block
7	Insulator	1	PA10TJLL94V-0	Block
6	Shunt terminal	1	C5210, 0.20t	Gold Finish On Contact Solder
5	Transfer Spring	1	C5210, 0.20t	Gold Finish On Solder
4	Ring spring	1	C5210, 0.20t	Not Underfoot
3	Ring spring	1	C5210, 0.20t	Gold Finish On Contact Area 80% Plating
2	Tip spring	1	C5210, 0.20t	Solder Tail Area, All over 50% Nickel Plated
1	Earth spring	1	C5210, 0.20t	

RECOMMENDED P.C.B LAYOUT (t=1.0mm)
TOP VIEW (TOLRANCE: ±0.05)

TOP VIEW (TOLERANCE: ± 0.05)

东莞市高迪电子有限公司

CUSTOMER	TITLE:	ø3.5mm PHONE JACK
----------	--------	-------------------

DRAWING	MODEL NO.
	PJR-D3261M-ABK7AS02L-RH

SHEET: 1 of 1	FILE NO.	Q/DY. QW-001A-0722
---------------	----------	--------------------

原始设计: 罗振强 承认: 刘伟 日期: 2020.04.23

UP WIN