
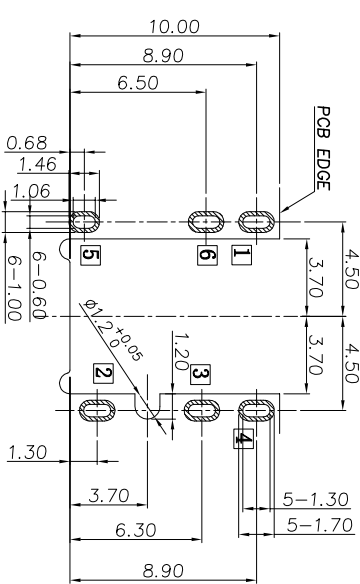
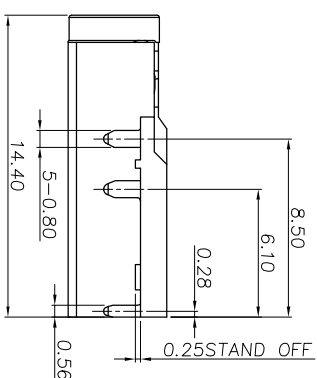
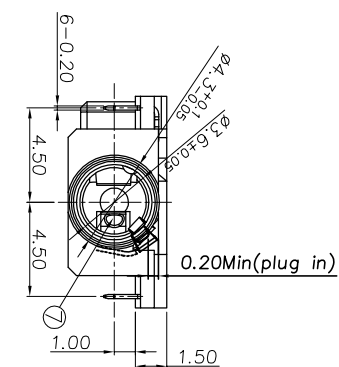
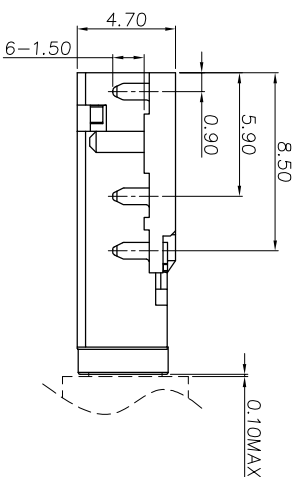


PJR-D3261P-ABK7AS02L-RH

(1) (2)(3) (4) (5) (6)

- (1) Series no.
- (2) Schematic type: A
- (3) Housing color:
BK7=Black
- (4) Terminal plating:
AS02=Plating Tin/Gold flash.
- (5) Packing mode:1=Reel packing
- (6) Environmental requirements:
RH=RH05 2.0 + Halogen Free


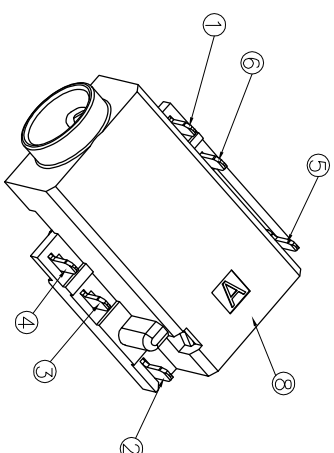


RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLERANCE: ± 0.05)

SPECIFICATION:

1. Electrical characteristics

- 1-1. Current rating:DC 1.0A max.
- 1-2. Voltage rating:DC 12V.
- 1-3. Contact resistance:50m Ω max.
- 1-4. Insulation resistance:100M Ω min. at 500V DC.
- 1-5. Withstanding voltage:500V AC for 1 minute.
2. Mechanical characteristics
 - 2-1. Life test:5000 cycles min,
 - 2-2. Mating force:3 $\sim$ 30N.
 - Umating force:3 $\sim$ 30N.

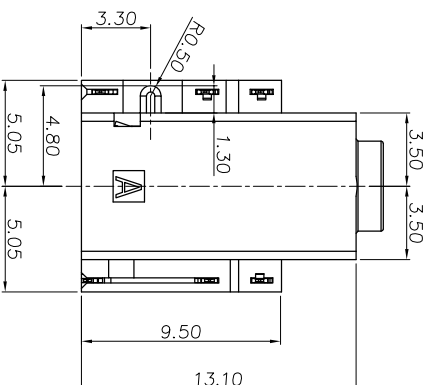

8	Housing	1	PA10T	Block
7	Insulator	1	PA10T	Block
5	Transfer Spring	5	CS210R, 0.20t	Gold Flash On Contact Area and Solder Tail Area. Placed over 50u" NiAu.
6	Shunt terminal	6	CS210R, 0.20t	Gold Flash On Contact Area and Solder Tail Area. Placed over 50u" NiAu.
4	Ring spring	4	CS191R, 0.20t	
3	Ring spring	3	CS191R, 0.20t	
2	Tip spring	2	CS210R, 0.20t	
1	Earth spring	1	CS210R, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

东莞市高迪电子有限公司

东莞市高迪电子有限公司									
				Angle	±2°	DESIGN	罗振强	2021.05.28	CUSTOMER DRAWING TITLE: $\phi 3.5\text{mm}$ PHONE JACK MODEL NO. PJR-D3261P-ABK7AS02L-RH Q/DY, QW-001A-0747 SHEET: 1 of 1
				.x	±0.35	CHECK			
				.xx	±0.25				
						APPROVAL			
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE: 1:1	UNIT:mm	A4
—	A-0	2021.05.28	NEW	罗振强	余军	.xxx	±0.15		