

PJR-D3261Q-ABK7AS02L-RH

(1) (2)(3) (4)(5)(6)

(2) Schematic type: A

(3) Housing color:

BK7=Black







(4) Terminal plating:

AS02=Plating Tin/Gold flash.

(5) Packing mode:L=Reel packing

(6) Environmental requirements:

RH=RoHS 2.0 + Halogen Free

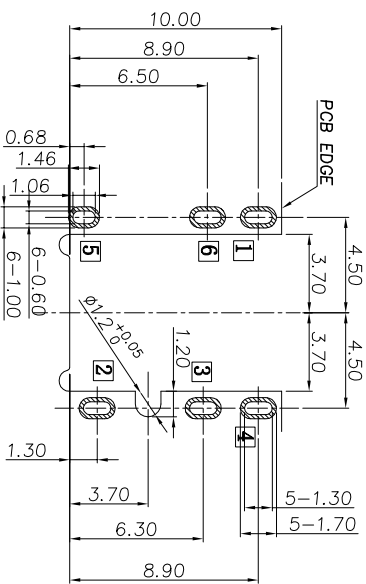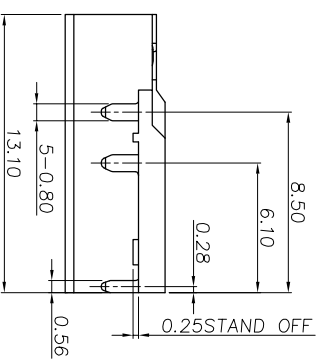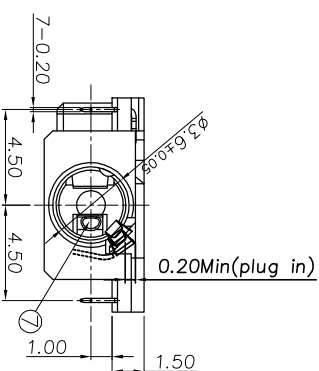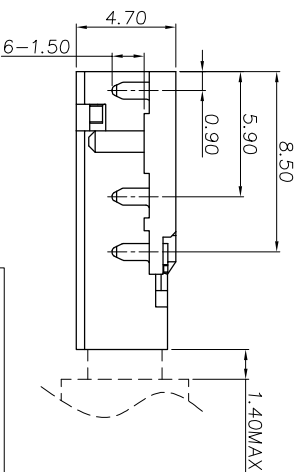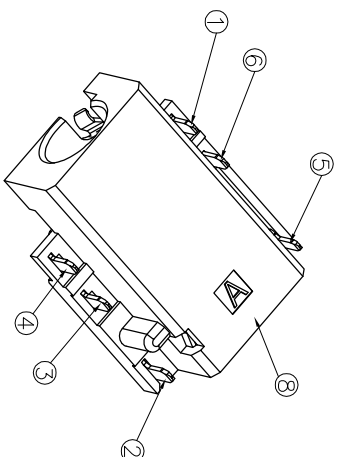


RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLERANCE: ± 0.05)

SCHEMATIC

1 M/G
4 G/M
2 L
5
6
3 R

A

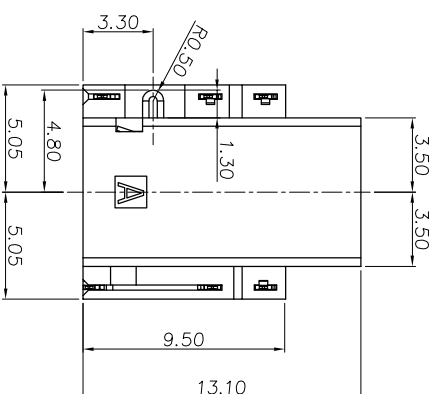

1. Electrical characteristics
 - 1-1. Current rating: DC 1.0A max.
 - 1-2: Voltage rating: DC 12V.
 - 1-3: Contact resistance: $50m\Omega$ max.
 - 1-4. Insulation resistance: $100M\Omega$ min. at 500V DC.
 - 1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
 - 2-1. Life test: 5000 cycles min.
 - 2-2. Mating force: $3\sim 30N$.
 - 2-3. Umating force: $3\sim 30N$.

8	Housing	1	PA10T	Black
7	Insulator	1	PA10T	Black
5	Transfer spring	5	C5210R, 0.20t	Good Flush On Contact Area And Solder Tail Area, 50u" Nickel
6	Shunt terminal	6	C5210R, 0.20t	Good Flush On Contact Area And Solder Tail Area, 50u" Nickel
4	Ring spring	4	C5210R, 0.20t	Good Flush On Contact Area And Solder Tail Area, 50u" Nickel
3	Ring spring	3	C5210R, 0.20t	Good Flush On Contact Area And Solder Tail Area, 50u" Nickel
2	Tip spring	2	C5210R, 0.20t	Good Flush On Contact Area And Solder Tail Area, 50u" Nickel
1	Earth spring	1	C5210R, 0.20t	Good Flush On Contact Area And Solder Tail Area, 50u" Nickel
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

东莞市高迪电子有限公司																
						Angle	±2°	DESIGN	刘伟	2021. 01. 29	CUSTOMER DRAWING TITLE: φ3.5mm PHONE JACK					
						. x	±0.35	CHECK								
						. xx	±0.25	APPROVAL								
————	A-0	2021.01.29	NEW	刘伟	余军	. xxx	±0.15	SCALE: 1 : 1	UNIT:mm	A4					☉	☐
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED								MODEL NO.	PJR-D3261Q-ABK7AS02L-RH	Q/D/Y. QW-001A-0732

东莞市高迪电子有限公司