
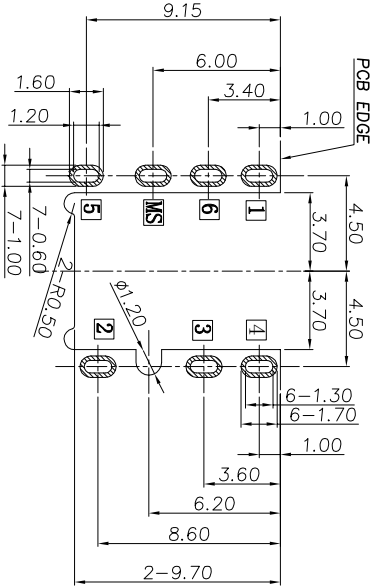
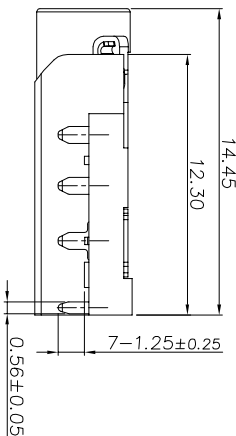
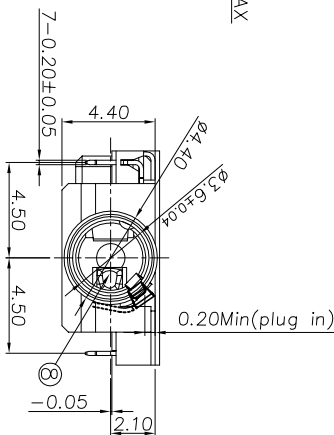
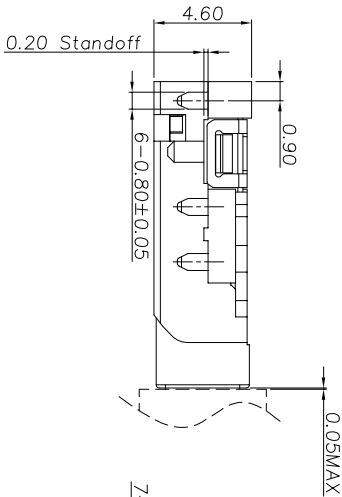
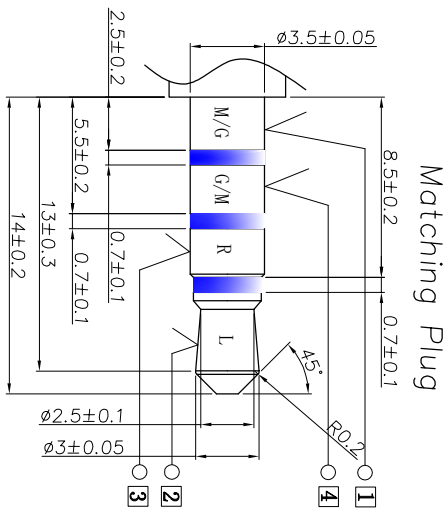
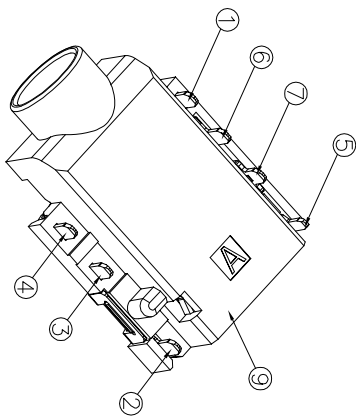


MODEL NO. :

PJ-D3261S-ABK7AS02L-RH

(1) (2)(3) (4)(5)(6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Plating Tin/Gold flash.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
Rh=RoHS 2.0 + Halogen Free


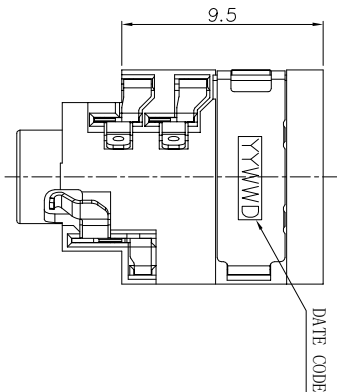


RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

SPECIFICATION:

1. Electrical characteristics

- 1-1. Current rating:DC 1.0A max.
1-2. Voltage rating:DC 12V.
1-3. Contact resistance:50mΩ max.
1-4. Insulation resistance:100MΩ min. at 500V DC.
1-5. Withstanding voltage:500V AC for 1 minute.
2. Mechanical characteristics
2-1. Life test:5000 cycles min.
2-2. Mating force:3~30N.
Unmating force:3~30N.

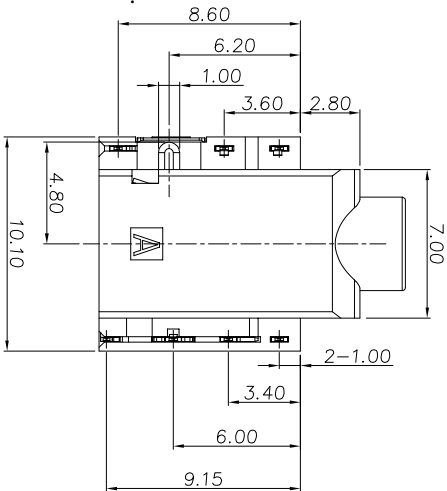

9	Housing	1	HIGH TEMPERATURE PLASTIC	Block
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Block
5	Transfer Spring	5	Phosphor bronze, 0.20t	Gold Flash On Contact Area And Solder Tail Nickel Plated 50"
7	shell	1	Phosphor bronze, 0.20t	Plating Ni 60"
6	Shunt terminal	6	Phosphor bronze, 0.20t	Gold Flash On Contact Area
4	Ring spring	4	Phosphor bronze, 0.20t	80"matted tin
3	Ring spring	3	Phosphor bronze, 0.20t	Plating on Solder Tail
2	Tip spring	2	Phosphor bronze, 0.20t	Area, All over 50"Nickel
1	Earth spring	1	Phosphor bronze, 0.20t	Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

东莞市高迪电子有限公司

CUSTOMER DRAWING

TITLE: ø3.5mm PHONE JACK
MODEL NO. PJ-R-D3261S-ABK7AS02L-RH
FILE NO. Q/DY-QW-001A-0706

ECN NO. REV DATE DESCRIPTION

CHANGE APPRO.

GENERAL TOLERANCE UNLESS OTHERWISE NOTED

SCALE: 1:1 UNIT:mm A4

SHEET: 1 of 1