
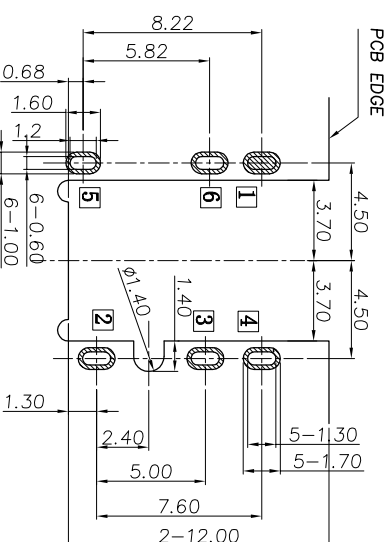
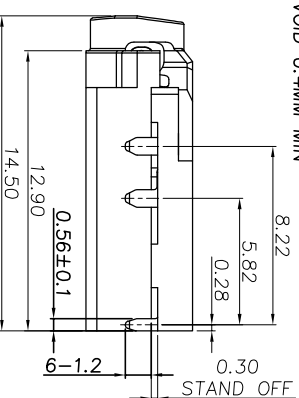
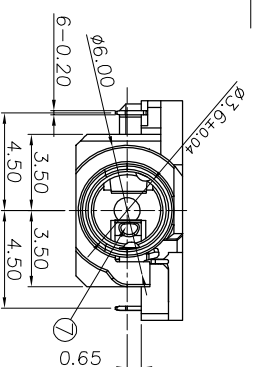


- (1)
- (2)
- (3)
- (4)
- (5)
- (6)

- SCHEMATIC**
-
- 1 M/G
- 2 L
- 3 R
- 4 G/M
- 5
- 6
- R

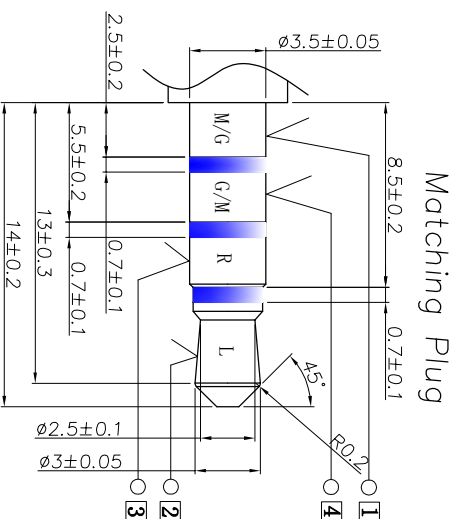

1. Electrical characteristics

-

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
8	Housing	1	PA10TJUL94V-0	Block
7	Insulator	1	PA10TJUL94V-0	Block
6	Shunt terminal	1	C5210, 0.20t	Good Fish on Contact
5	Transfer Spring	1	C5210, 0.20t	Good Fish on Solder
4	Ring spring	1	C5210, 0.20t	Nickel Undercoat
3	Ring spring	1	C5210, 0.20t	
2	Tip spring	1	C5210, 0.20t	Area Good Fish Plotted on Solder Tail Area, over 500 Nickel Plotted
1	Earth spring	1	C5210, 0.20t	

东莞市高迪电子有限公司

					Angle	±2°	DESIGN	刘伟	2020.08.20
—	02	2020.08.20	按客户要求,修改1#端子处结构	刘伟	余军	.x	±0.38	CHECK	
—	01	2020.07.29	增加倒角	刘伟	余军	.xx	±0.25		
—	00	2020.07.18	NEW	刘伟	余军	.xxx	±0.10	APPROVAL	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 1:1	UNIT:mm
								A4	

UP WIN