
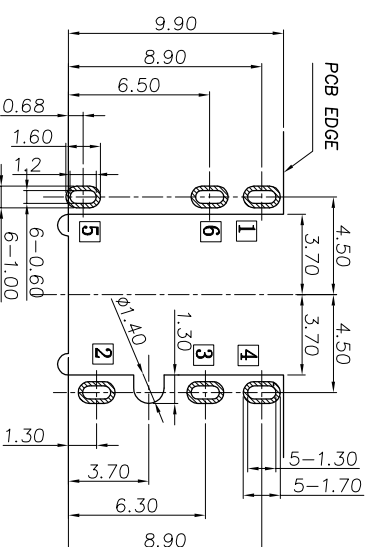
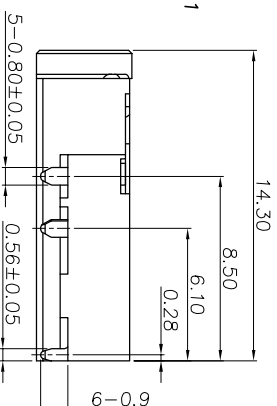
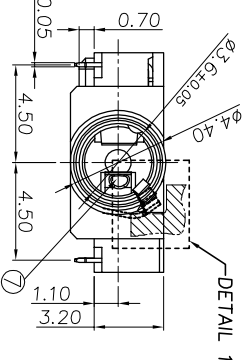
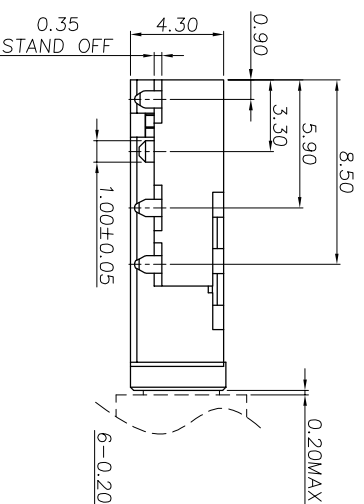
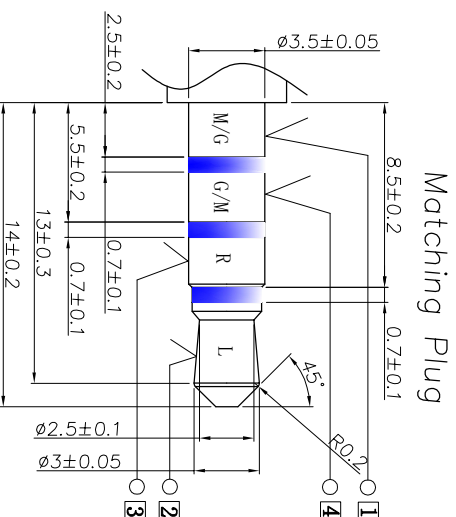
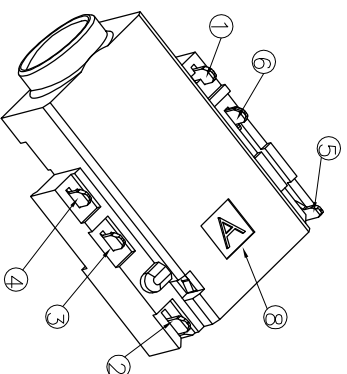
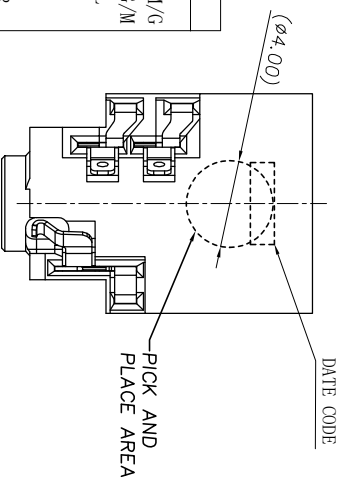


PJR-D3261Z - A BK7 AU02 L - RH

- (1)
- (2)
- (3)
- (4)
- (5)
- (6)



- (1) Series no.
- (2) Schematic type: A,B,C
- (3) Housing color:
BK7=Black
- (4) Terminal plating:
AU02=AU 1U"
- (5) Packing mode:L=Reel packing
- (6) Environmental requirements:
Rh=RoHS 2.0 + Halogen Free



RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLERANCE: ± 0.05)

1. Electrical characteristics

- 1-1. Current rating: 1Amps.
- 1-2. Voltage rating: 12V DC.
- 1-3. Contact resistance: Between Jack-Plug: 50m Ω max;
Within Jack Break Spring, Make Spring: 30m Ω max.
- 1-4. Insulation resistance: 100M Ω min. at 500V DC, 1.30
- 1-5. Withstanding voltage: Mated Set or Plug: 250V AC
Or Jack: 500V AC.
2. Mechanical characteristics
 - 2-1. Life test: 5000 cycles min,
 - 2-2. Mating force: 3~30N.
Umating force: 3~30N.
3. Operating Temperatures: -25°C ~ +70°C, 85%RH Max.

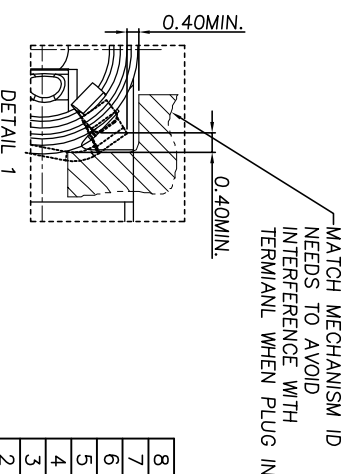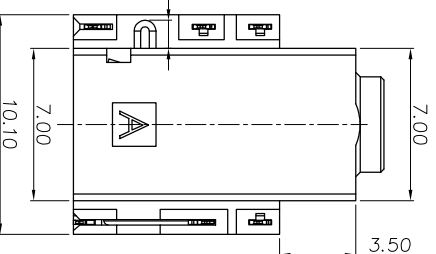

8	Housing	1	PA10TJUL94V-0	Block
7	Insulator	1	PA10TJUL94V-0	Block
6	Shunt terminal	1	C5210, 0.20t	
5	Transfer Spring	1	C5210, 0.20t	1u" Au On
4	Ring spring	1	C5210, 0.20t	Contact Gold
3	Ring spring	1	C5210, 0.20t	Flash On Solder
2	Tip spring	1	C5210, 0.20t	Toil Area, 50U"
1	Earth spring	1	C5210, 0.20t	Nickel UnderPlated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

东莞市高迪电子有限公司

东莞市高迪电子有限公司																			
CUSTOMER DRAWING		TITLE:		φ3.5mm PHONE JACK															
MODEL NO.		PJR-D3261Z-ABK7A102L-RH																	
FILE NO.		Q/DY-QW-001A-0741																	
SHEET:1 of 1																			
A4		UNIT:mm		SCALE: 1:1		GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO.		CHANGE		DESCRIPTION		DATE		REV		ECN NO.	
2021.04.22		刘伟		DESIGN		±2°		Angle											
				CHECK		±0.35		.x											
				APPROVAL		±0.25		.xx											
						±0.15		.xxx		刘伟		NEW		2021.04.22		A-0			