

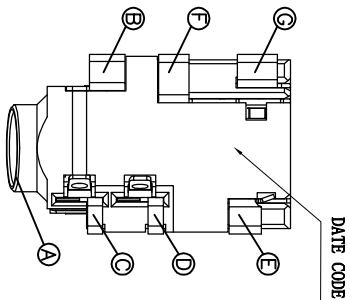
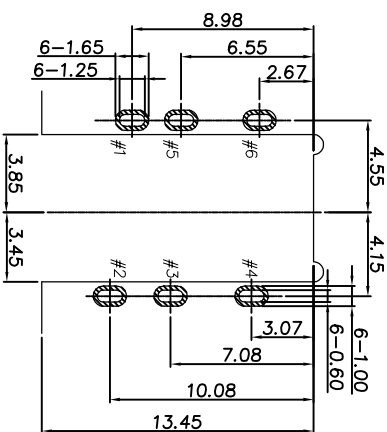


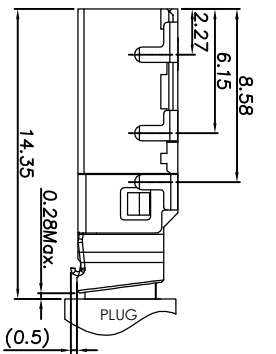


- SPECIFICATION:
- Electrical characteristics
 - Current rating:1Apms.
 - Voltage rating:12V DC.
 - Contact resistance:50m Ω max Initial;
After test:60m Ω max
 - Insulation resistance:100M Ω min. at 500V DC.
 - Withstanding voltage:500V AC.
 - Mechanical characteristics
 - Life test:5000 cycles min,
 - Mating force:3~30N.
Unmating force:3~30N.

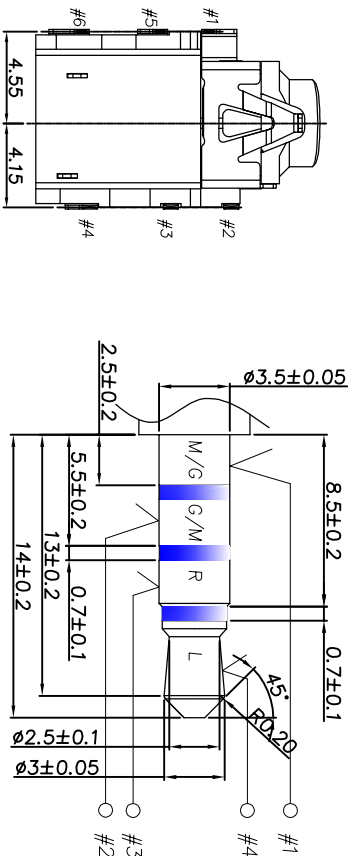

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)



Matching Plug

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
(H) Molding	1	PA10T	Block UL94 V-0	
(G) Contact 6	1	CS210, 0.20t	Gold Flush on contact area and solder toll.	
(F) Contact 5	1	CS210, 0.20t	50u Nickel underplated.	
(E) Contact 4	1	CS210, 0.20t		
(D) Contact 3	1	CS210, 0.20t	Gold Flush on contact area and solder toll.	
(C) Contact 2	1	CS210, 0.20t	50u Nickel underplated.	
(B) Contact 1	1	CS210, 0.20t		
(A) Housing	1	PA10T	Block UL94 V-0	

东莞市高迪电子有限公司

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	UNLESS OTHERWISE NOTED	SCALE: 3:1	UNIT:mm	A4	Angle	±2°	DESIGN	罗振强	2021.05.21
						.x	CHECK			.xx	±0.38			
						.xxx	APPROVAL			罗振强	±0.25			
			NEW	罗振强	余军	±0.10					±0.10			

CUSTOMER DRAWING		TITLE:	
MODEL NO.	PJR-D3264C-ABK7A102L-RH	FILE NO.	Q/DY, QM-001A-0746