


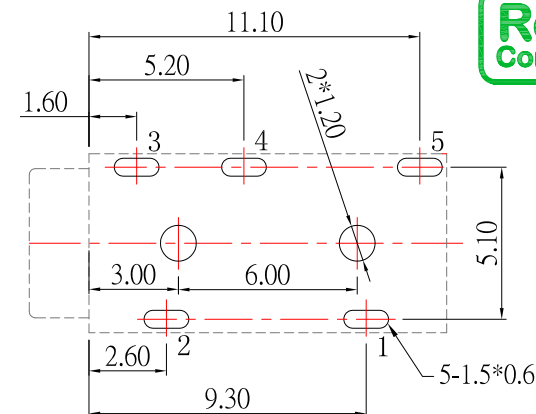
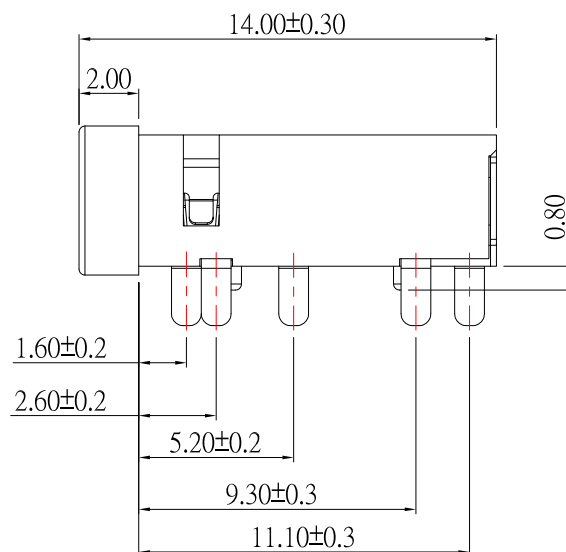


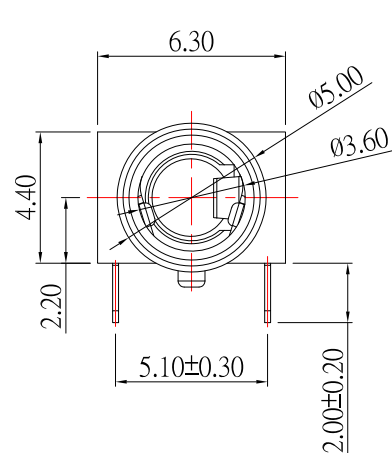



P.C.B LAYOUT
MOUNTING PATTERN

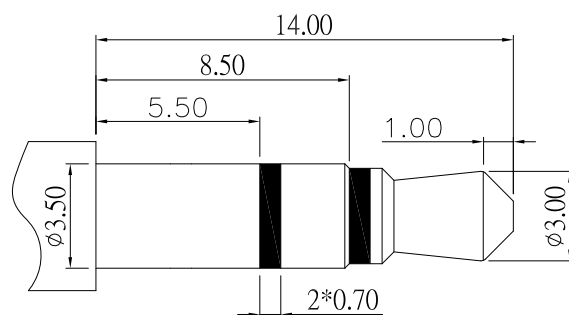

Ø3.50mm 3 POLE PLUG

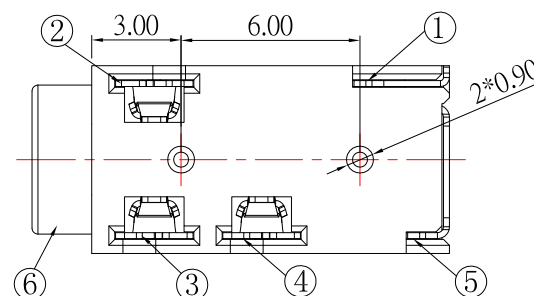

SCHEMATIC

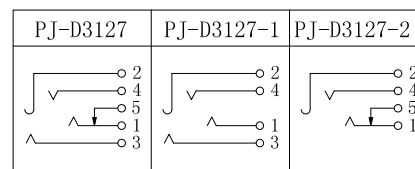

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

6	HOUSING	1	PBT	
5	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
4	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
3	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
1	SPRING PIECE	1	PHOSPHOR BRONZE	Au/Ag-Plating
No	PART NAME	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	09/01/17			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	09/01/17			
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO. PJ-D3127-x-S124
Tony Kao	09/01/17	SHEET NO.	1 of 1	PART NO. PJ-D3127-x-S124

SIZE
A4
VER
A0