

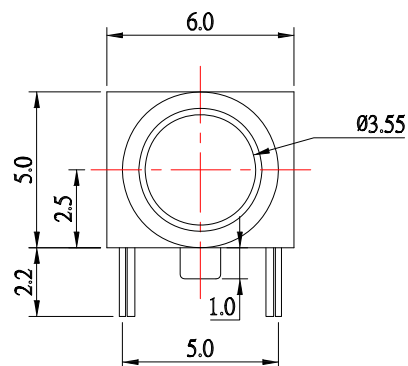
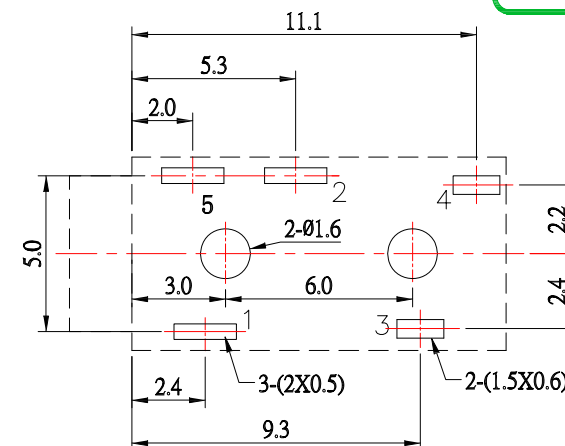
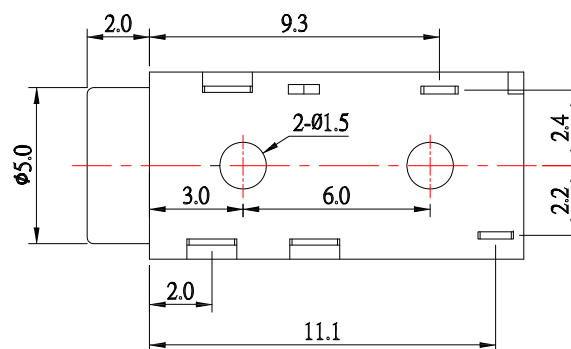


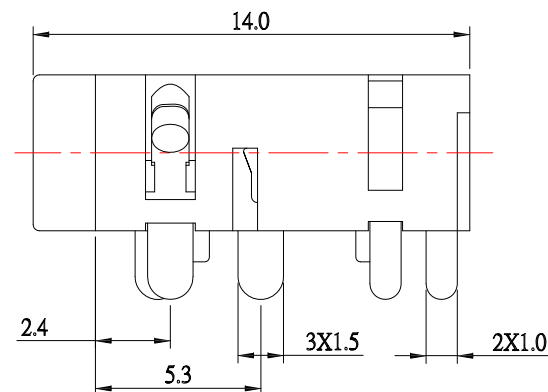

SCHEMATIC

PJ-D3027D	PJ-D3027D-1	PJ-D3027D-2

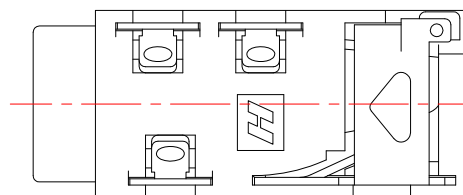

P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
07/23/13
DATE
07/23/13
DATE
07/23/13

MAT'L	FINISH	SCALE	TITLE	JACK
		1 : 1	MODLE	PHONE JACK
		DWG NO.	PJ-D3027D-S125	SIZE A4
		PART NO.	PJ-D3027D-S125	VER R1

ITEM NO.
1

DESCRIPTION
更新Contact resistance

DRAWN
Jack

DATE
072313