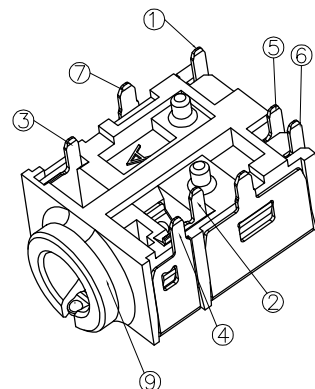



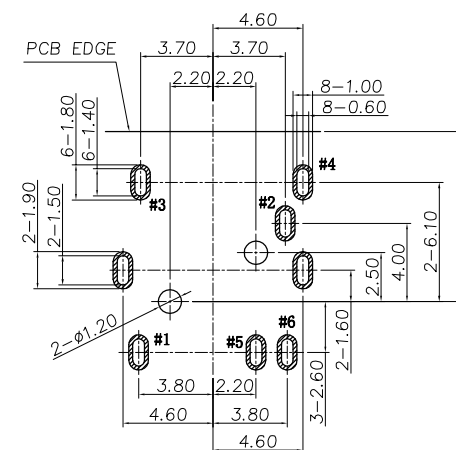
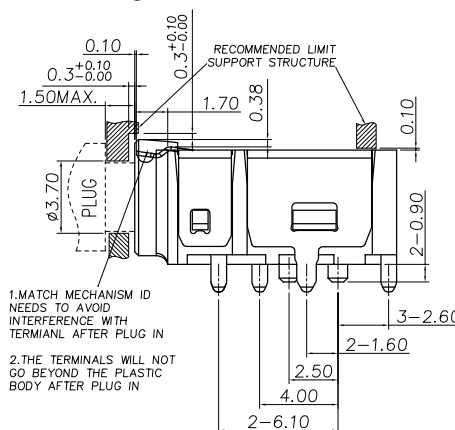
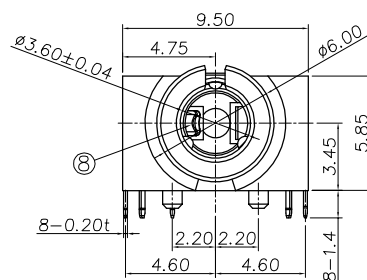
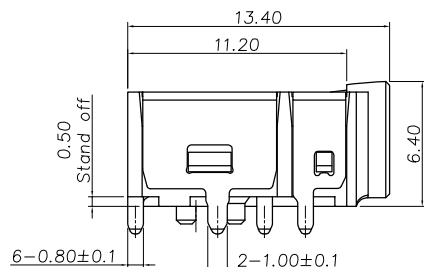
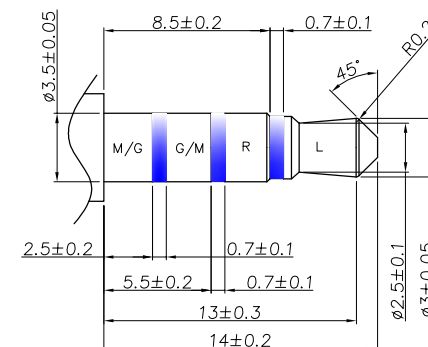
MODEL NO. :
PJR-D3341A-ABK7AU0*L-RH

(1) (2)(3) (4)(5)(6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
(4) Terminal plating:
AU02=Plating Gold Flash.
AU03=Plating Au 3u".
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free



Matching Plug

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

SPECIFICATION:

1. Electrical characteristics

1-1. Current rating: DC 1A max.

1-2. Voltage rating: DC 12V.

1-3. Contact resistance: 50mΩ max (Initial).

After test: 100mΩ max

1-4. Insulation resistance: 100MΩ min. at 500V DC.


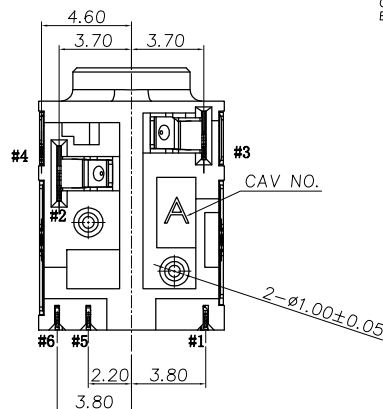
1-5. Withstanding voltage: 500V AC for 1 minute.

2. Mechanical characteristics

2-1. Life test: 5000 cycles min,

2-2. Mating force: 3~30N,

Unmating force: 3~30N.



⑨	Housing	1	PA10T R630NH UL 94V-0	Black
⑧	Insulator	1	PA10T R630NH UL 94V-0	Black
⑦	Shell		C5210R, 0.20t	Plating Ni 50u"Min.
⑥	TERMINAL 6		C5210R, 0.20t	Gold Flash on Contact Area and Solder area 50u" Nickel UnderPlated
⑤	TERMINAL 5		C5210R, 0.20t	
④	TERMINAL 4		C5210R, 0.20t	
③	TERMINAL 3		C5210R, 0.20t	Gold (See Table) on Contact Area and Solder area 50u" Nickel UnderPlated
②	TERMINAL 2		C5210R, 0.20t	
①	TERMINAL 1		C5210R, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

东莞市高迪电子有限公司

CUSTOMER
DRAWING

TITLE:

Ø3.5mm PHONE JACK

MODEL NO.

PJR-D3341A-ABK7AU0*L-RH

FILE NO.

Q/DY. QW-001A-XXXX

ECN NO.

REV

DATE

DESCRIPTION

CHANGE

APPRO.

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

SCALE: 1:1

UNIT:mm

A4

SHEET: 1 of 1

新增AU03 半金镍3u"规格

刘伟

余军

. x

±0.30

DESIGN

刘伟

2021. 06. 07

UPDATE

刘伟

余军

. xx

±0.20

CHECK

NEW

李江林

余军

. xxx

±0.10

APPROVAL