

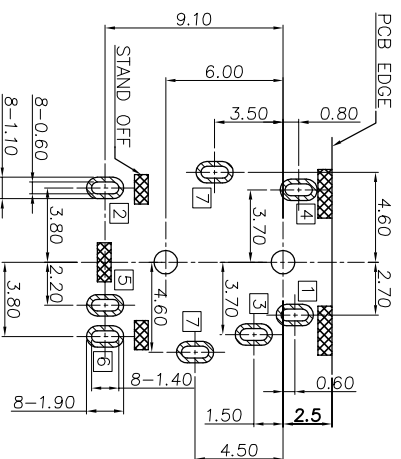
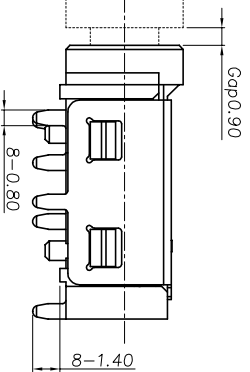



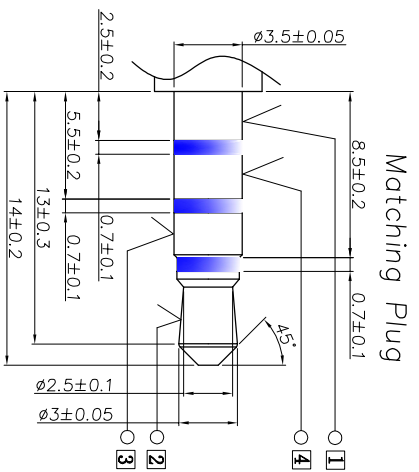



- MODEL NO.:
PJR-D32370-ABK7AS06L-RH
- (1) (2) (3) (4) (5) (6)
- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
- (4) Terminal plating:
AS06=Plating Tin/AU 30" min.
- (5) Packing mode:L=Reel packing
(6) Environmental requirements:
Rh=RoHS 2.0 + Halogen Free

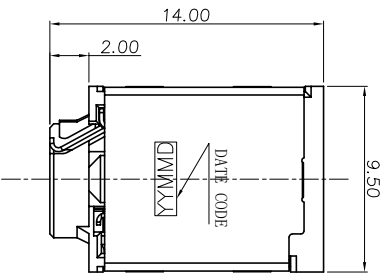


SCHMATIC



RECOMMENDED P.C.B LAYOUT (t=1.0mm)
TOP VIEW (TOLERANCE: ±0.05)

- SPECIFICATION:**
1. Electrical characteristics
1-1. Current rating: DC 0.5A max.
1-2. Voltage rating: DC 30V.
1-3. Contact resistance: 50mΩ max.
1-4. Insulation resistance: 100MΩ min. at 500V DC.
1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
2-1. Life test: 5000 cycles min,
2-2. Mating force: 3~30N,
Umating force: 3~30N.

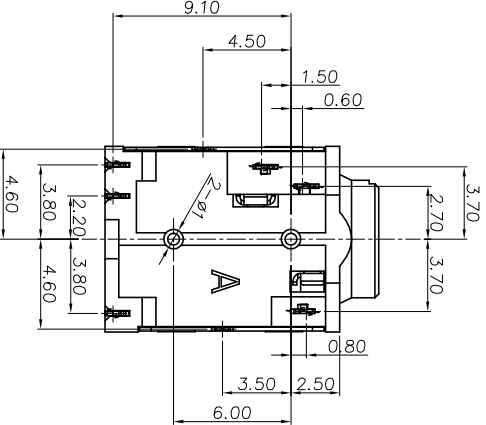

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
9	Housing	1	HIGH TEMPERATURE PLASTIC	Block
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Block
6	Shunt terminal	1	Phosphor bronze, 0.20t	Gold Finish On Contact And Solder Tail Area, 50μ Nickel Underplated
5	Transfer Spring	1	Phosphor bronze, 0.20t	Plating Ni.
7	Shell	1	Phosphor bronze, 0.20t	
4	Ring spring	1	Phosphor bronze, 0.20t	30μ Au On Contact Area
3	Ring spring	1	Phosphor bronze, 0.20t	30μ Au On Contact Area
2	Tip spring	1	Phosphor bronze, 0.25t	30μ Au On Contact Area
1	Earth spring	1	Phosphor bronze, 0.20t	50μ Nickel Underplated

东莞市高迪电子有限公司

TITLE: φ3.5mm PHONE JACK
MODEL NO. PJR-D32370-ABK7AS06L-RH
FILE NO. Q/SSY-QW-001A-0562

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE: 3:1	UNIT:mm	A4	SHEET: 1 of 1
						Angle ±2°	DESIGN	李海鹏	2016.11.26	
	A-1	2016.11.26	外壳改镀可焊镍.	李海鹏	李海鹏	.x ±0.30	CHECK			
	A-0	2015.07.20	NEW	李海鹏	余军	.xx ±0.25	APPROVAL			