
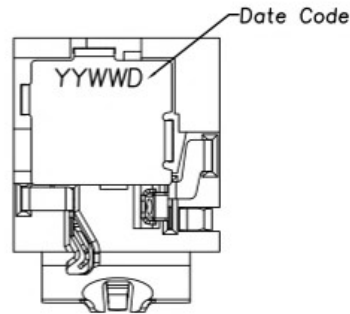



MODEL NO.:
PJR-D32630-A BK7 AS02 L-RH







- (1) (2) (3) (4) (5) (6)
- (1) Series no.
 - (2) Schematic type: A
 - (3) Housing material and color:
BK7=PA10T(black)
 - (4) Terminal plating:
AS02=1#~4#Gold flash on contact area, Plate Matte tin on solder tail; 5# 6# Silver plating.
 - (5) Packing mode: L=Reel packing
 - (6) Environmental requirements:
RH=RoHS & Halogen Free

SPECIFICATION:

1. Electrical characteristics
 - 1.1. Current rating: DC 0.5A max.
 - 1.2. Voltage rating: DC 30V.
 - 1.3. Contact resistance: $\leq 50m\Omega$ (Initial)
After test: $\leq 100m\Omega$
 - 1.4. Insulation resistance:
100M Ω min. at 500V DC.
 - 1.5. Withstanding voltage:
500V AC for 1 minute.
2. Mechanical characteristics
 - 2.1. Life test: 5000 cycles min.
 - 2.2. Mating force: 3~30N,
Unmating force: 3~30N.
3. Temperature range: -40~C~+80~C



□: Terminal No.
①: Project No.

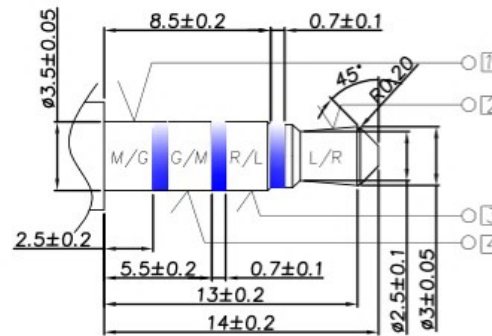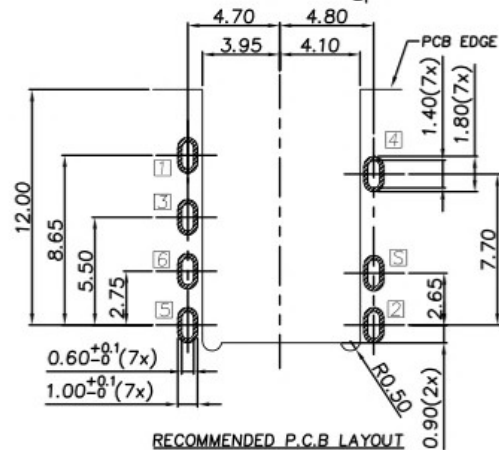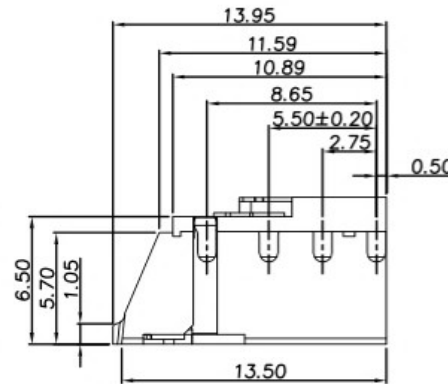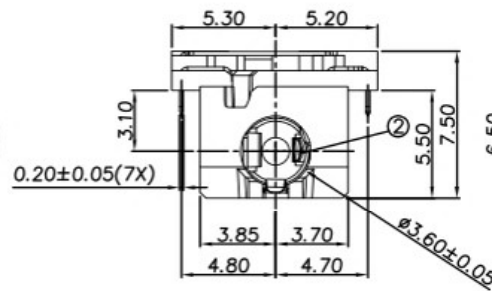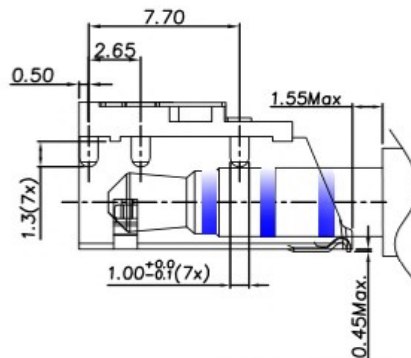

Matching Plug

⑨	Shield shell	5	1	C2680, t0.2	Nickel 50u" Min
⑧	Make terminal	6	1	C5210, 0.20t	5u" Silver, 50u" Ni underplated.
⑦	Transfer Spring	5	1	C5210, 0.20t	
⑥	Ring spring	4	1	C5210, 0.20t	
⑤	Ring spring	3	1	C5210, 0.20t	Gold Flash on contact area, Plate Matte tin on solder tail, Nickel underplated.
④	Tip spring	2	1	C5210, 0.20t	
③	Earth spring	1	1	C5210, 0.20t	
②	Separator		1	PA10T UL-94V0	Black
①	Housing		1		Black
NO.	DESCRIPTION	QTY		MATERIAL	REMARK

						X.	±2°	DESIGN	刘 伟		2015. 07. 31	高迪电子有限公司		
						. X	±1°	CHECK						
						X. X	±0. 38							TITLE:
—————	A-0	2015. 7. 31	NEW	刘 伟	余 军	X. XX	±0. 25	APPROVAL				MODEL NO.	PJR-D32630-ABK7AS02L-RH	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4		SHEET:1 of 1	FILE NO.	Q/SSY.QW-001A-0547