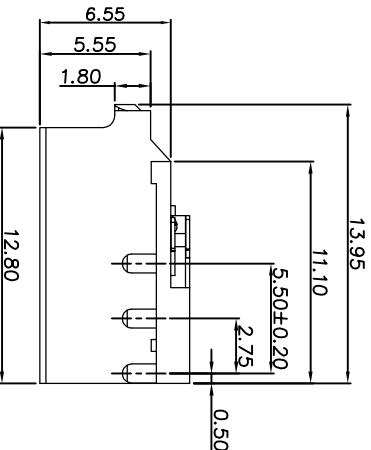
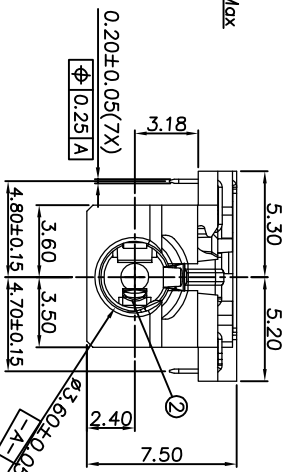
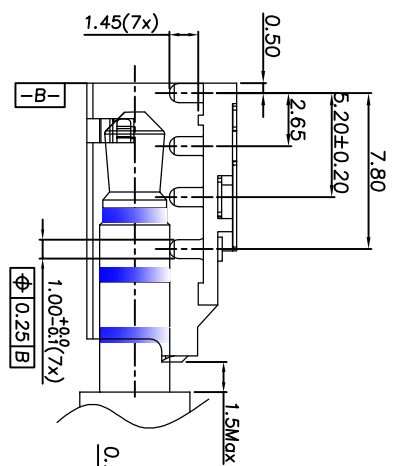





①: Terminal No.
②: Project No.

MODEL NO.:
PJR-D32660-A BKZ ASO2 L-RH

(1) Series no.
(2) Schematic type: A
(3) Housing material and color:
BKZ=PA10T(black)

(4) Terminal plating:
ASO2=1#~4#Gold flash on contact
area, 80u" Matte tin on
solder tail 5#~6# Silver plating.

(5) Packing mode: L=Reel packing
(6) Environmental requirements:
RH=RHs & Halogen Free

SPECIFICATION:

1. Electrical characteristics

1.1. Current rating: DC 0.5A max.
1.2. Voltage rating: DC 30V.
1.3. Contact resistance: $\leq 50m\Omega$ (Initial)
After test: $\leq 100m\Omega$




1.4. Insulation resistance:
100M Ω min. at 500V DC.

1.5. Withstanding voltage:
500V AC for 1 minute.

2. Mechanical characteristics

2.1. Life test: 5000 cycles min,
2.2. Mating force: 4~30N,
Unmating force: 4~30N.

3. Temperature range: -40°C ~ +80°C

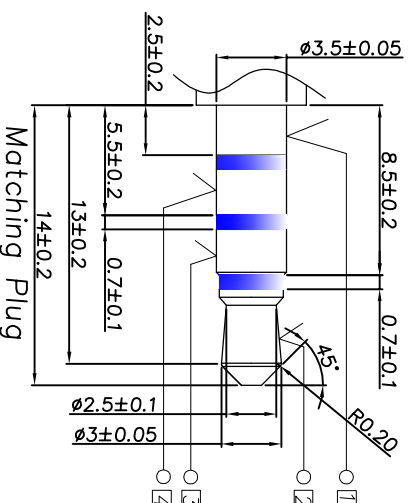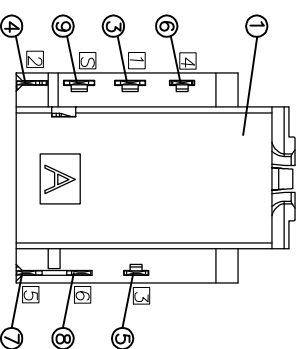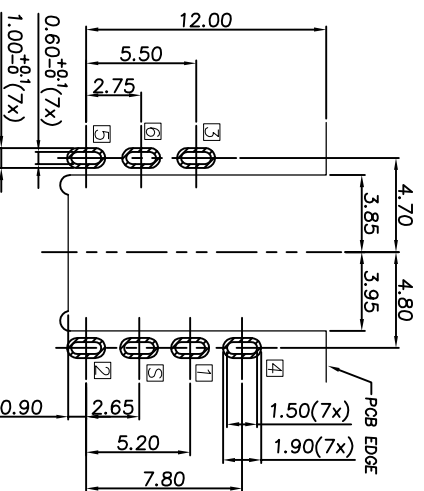

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑨	Shield shell	5	C2680, t0.2	Nickel 60u" Min
⑧	Make terminal	6	C5210, 0.20t	5u" Silver, 50u" Ni
⑦	Transfer Spring	5	C5210, 0.20t	undepulded.
⑥	Ring spring	4	C5210, 0.20t	Gold Flash on contact area, 80u" Matte tin on solder tail, 50u" N undepulded.
⑤	Ring spring	3	C5210, 0.20t	
④	Tip spring	2	C5210, 0.20t	
③	Earth spring	1	C5210, 0.20t	
②	Separator	1	PA10T UL-94V0	Black
①	Housing	1		Black

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

东莞市高迪电子有限公司											
TITLE:		φ3.5mm PHONE JACK									
MODEL NO.		PJR-D32660-ABK7AS02L-RH									
FILE NO.		Q/SSY-QM-001A-0497									
SHEET: 1 of 1											
UNIT:mm		A4							2015.01.08		
SCALE: 3:1		DESIGN		余 军		2015.01.08					
CHECK		10<L≤20		±0.3							
APPROVAL		5<L≤10		±0.25							
		L≤5		±0.20							
APPRO.		余 军		CHANGE		余 军		DESCRIPTION		NEW	
REV		A-0		DATE		2014.08.16		ECN NO.			

原始设计: *YUQUN* 承认: 余军
日期: 2014.7.14

SSYE