
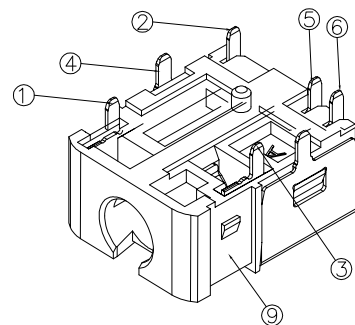







MODEL NO. :
PJR-D33410-ABK7AS06L-RH

(1) (2B) (4) (5) (6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black.
(4) Terminal plating:
AS06= Au 30u".
(5) Packing mode:
L=Reel packing.
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free.
RS=RoHS 2.0.



Matching Plug

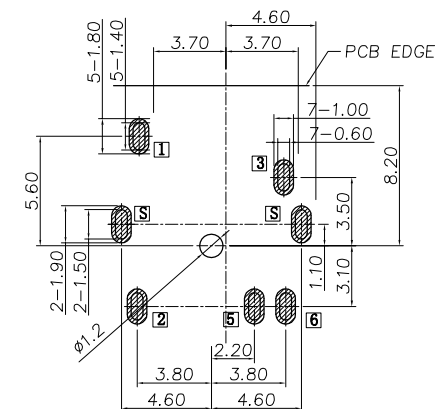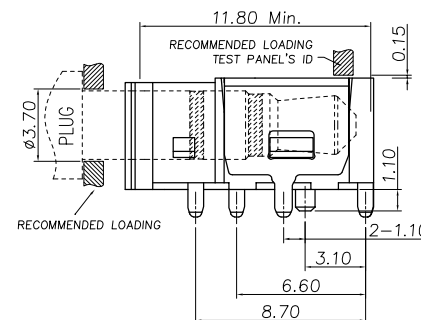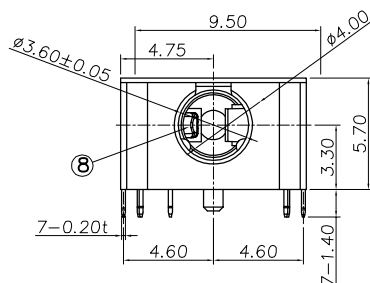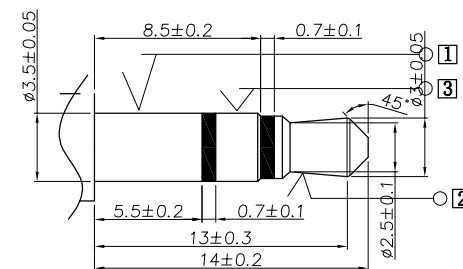

SPECIFICATION:

1. Electrical characteristics

- 1-1. Current rating: DC 1A max.
1-2. Voltage rating: DC 12V.
1-3. Contact resistance: 50mΩ max.
1-4. Insulation resistance: 100MΩ min. at 500V DC.
1-5. Withstanding voltage: 500V AC for 1 minute.




2. Mechanical characteristics

- 2-1. Life test: 5000 cycles min,
2-2. Mating force: 3~30N,
Unmating force: 3~30N.

3. Salt spray test time: 48 hours min.

4. Sign "Ⓢ" shows QIP measurement items.

Marked "Ⓢ" Dimension Should Be Measured By CPK

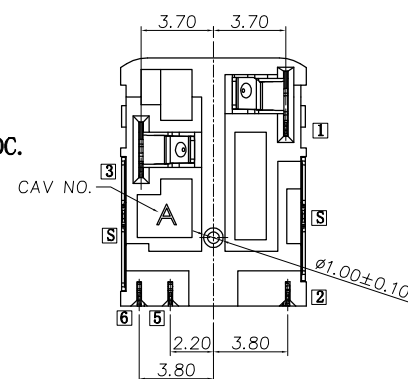

RECOMMENDED P.C.B LAYOUT (t=1.0mm)
TOP VIEW (TOLRANCE: ±0.05)

9	Housing	1	PA10T R630NH+30%GF UL 94V-0	Black
8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	Black
6	Shunt terminal	1	Phosphor bronze, 0.20t	5u" Ag On Contact And Solder Tail Area, 50u" Nickel UnderPlated
5	Transfer Spring	1	Phosphor bronze, 0.20t	
4	Shell	1	Phosphor bronze, 0.20t	Plating Ni 80u"Min.
3	Ring spring	1	Phosphor bronze, 0.20t	30u" Au On Contact Area
2	Tip spring	1	Phosphor bronze, 0.20t	100u" Matte-Tin Plating on Solder Tail Area, 50u" Nickel UnderPlated
1	Earth spring	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

东莞市高迪电子有限公司

CUSTOMER DRAWING	TITLE:	Ø3.5mm PHONE JACK
	MODEL NO.	PJR-D33410-ABK7AS06L-RH
SHEET: 1 of 1		FILE NO. Q/DY. QW-001A-0572